


# 24 HEAVY-DUTY DUAL OUTLETS TIMER

## PROGRAMING & SAFETY INSTRUCTIONS

### RATINGS

**Rated Voltage:**  
115VAC, 60Hz, 15A  
Tungsten & Resistive, 1/2HP  
**Max.Loading:** 1725W

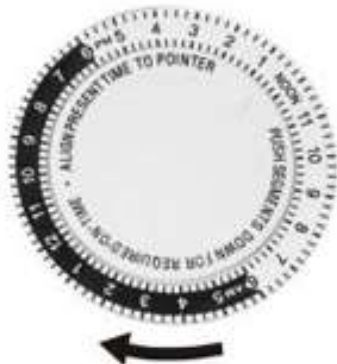

### WARNING

- Electrical shock hazard
- Risk of injury or death
- Risk of fire
- Use a grounded outlet
- Follow local electrical codes
- For indoor use only

### SET UP CLOCK

- Turn the dial clockwise and align the current time with the black arrow ▲. (Fig 01 = 11:00am)

### PROGRAMING / SCHEDULE

- Push down a single **PIN** for every 15 minutes of **ON** time. (Fig 02)  
e.g. If you want the timer to give power between 11:00 and 12:00, push down ALL four pins between 11:00 and 12:00.
- Plug timer into the socket.
- Connect this facility with the household appliance.

### MODE SELECTION

- Slide the red switch **UP** to activate the timer. (Fig 03)
  - Power will now turn **ON** according to the **PIN** configuration.
- Slide the switch **DOWN** to deactivate the timer. Power will always be ON.

Fig 01

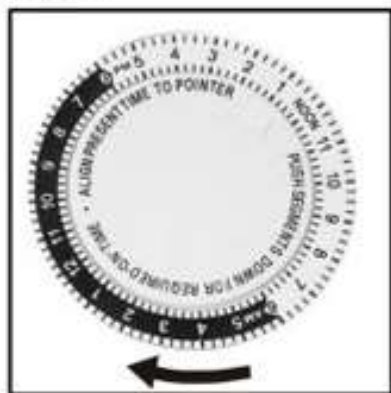


Fig 02


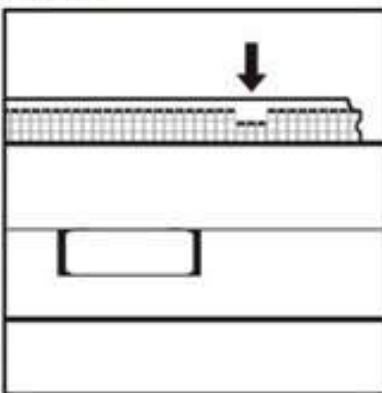


Fig 03

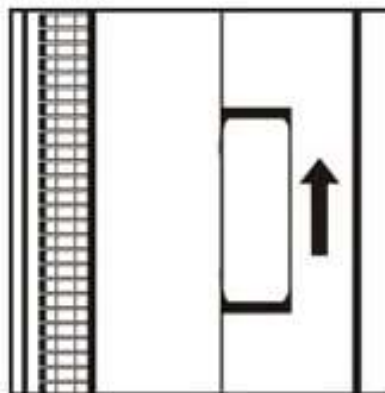

Incorrect use of the product caused the damage is not covered by the guarantee!