
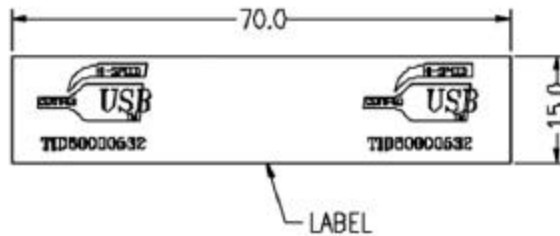


P1: M-942A

P2: M-971C

Customer No: No.1

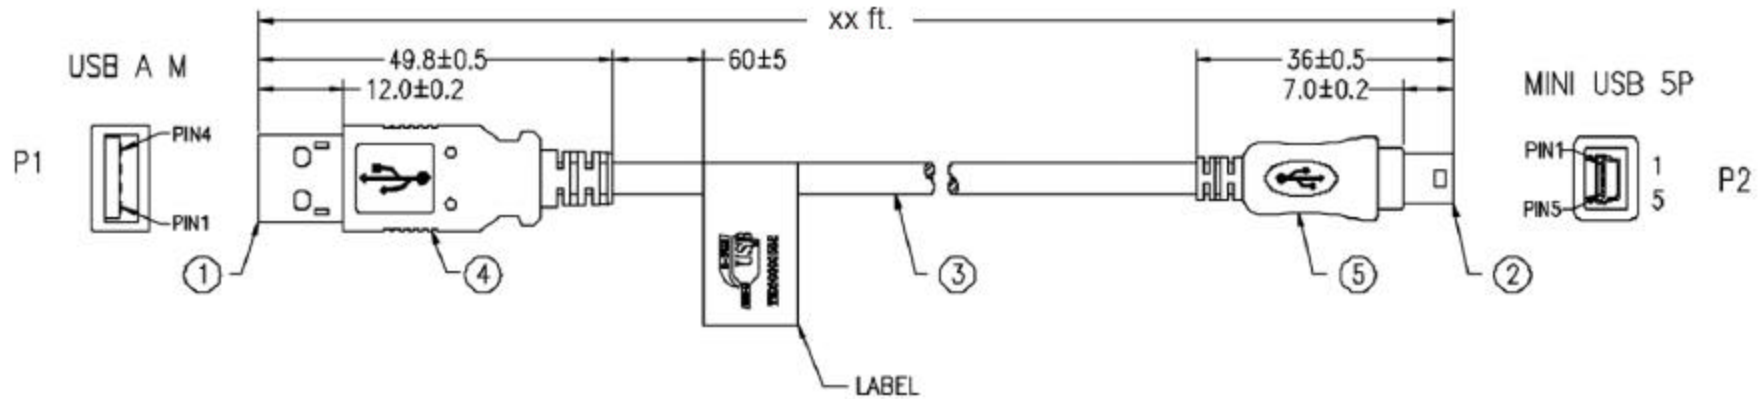

PIN ASSIGNMENT			
P1		P2	
1	—	1 RED	24#
2	—	2 WHITE	
3	—	3 GREEN	
4	—	5 BLACK	24#
SHIELD	—	SHIELD	

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
5	BLACK HEAT SHRINK TUBE Ø1.0*5mm	4	M743
	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 24AWG,OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EJAB2801P2402C-139	1810mm	M304
2	MINI USB 5P MALE 2.0, GOLD PLATING 30u" ON CONTACTS, BLACK INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1	M108

APPROVED		SFCABLE.COM 1-888-275-8755	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm		
CHECKED	HU				
DRAWING	LI				
DATE	12/DEC/08	ITEM NO.	10U2-151xx	UNIT:mm	

CHECKED