


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	REVISION	"	H.T.

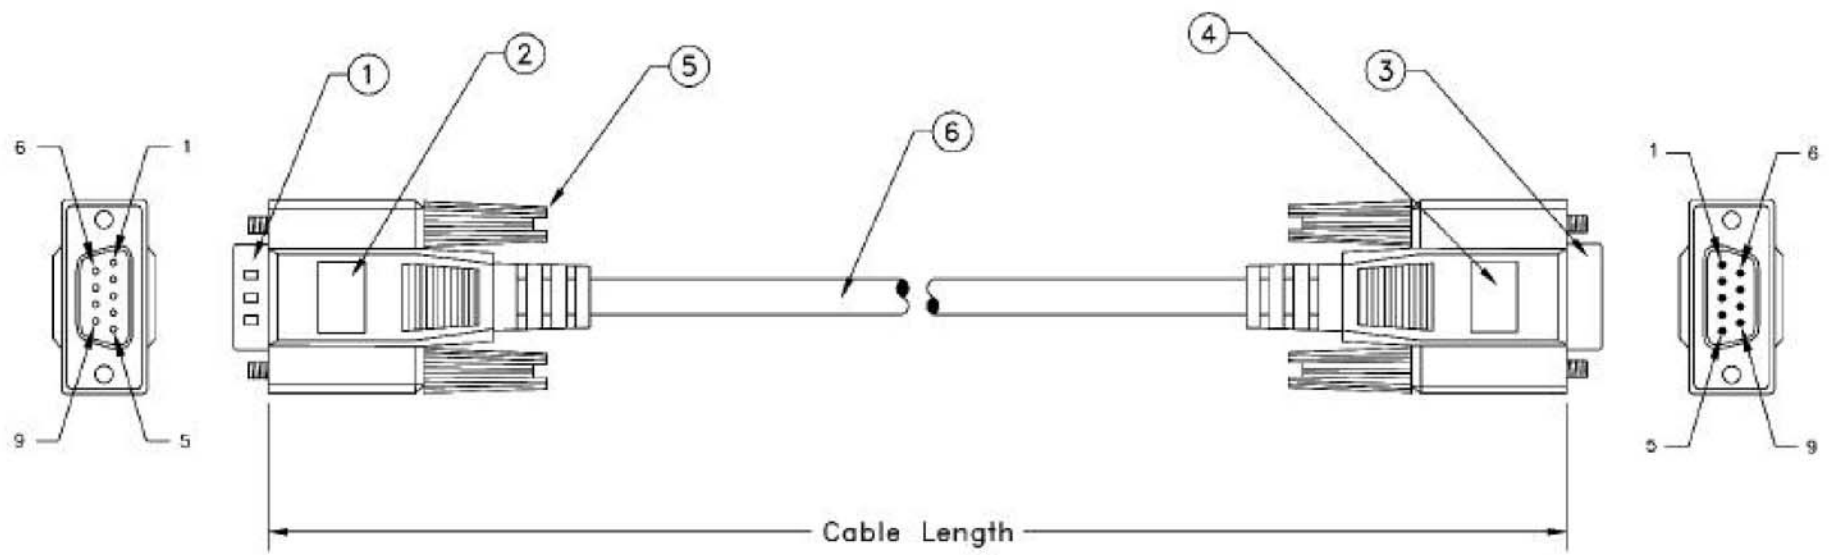

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 9 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Male W/Gold Plating Contacts	1	PCS.

**CABLE ASSEMBLY PARTS LIST**

<small>UNLESS OTHERWISE SPECIFIED:  1. DIMENSIONS ARE IN INCHES  2. TOLERANCES:  DECIMALS: .XXX ±0.25  3. DO NOT SCALE DRAWING  4. REMOVE ALL BURRS AND  BREAK SHARP EDGES.</small>	CUSTOMER
	R.F.Q. NO.
	DRAWN DATE <b>Howie Tseng 05/18/94</b>
	CHECKED
<small>PROPRIETARY DOCUMENT  THIS DRAWING AND/OR INFORMATION OR  SUBJECT MATTER CONTAINED HEREIN,  SHALL NOT BE USED, COPIED OR  DISSEMINATED IN ANY MANNER, OR FOR  ANY PURPOSE, OTHER THAN AS  EXPRESSLY STATED BY</small>	CUSTOMER APPROVAL

<b>SFCable.com</b>			
<b>1-888-275-8755</b>			
TITLE <b>DB9 Molded Extension Cable Assembly (DB9, M/F, 1:1, Straight Through)</b>			
SIZE	DWG. NO.	PART NO.	REV.
	<b>D920-XX</b>	<b>D920-XX</b>	<b>A</b>
SCALE: NONE	REVISION DATE: 04/10/06	SHEET: 1 OF 1	