



P1, P2: M-269E
 P3: M-438A
 P4: M-323C

Customer No: No.1

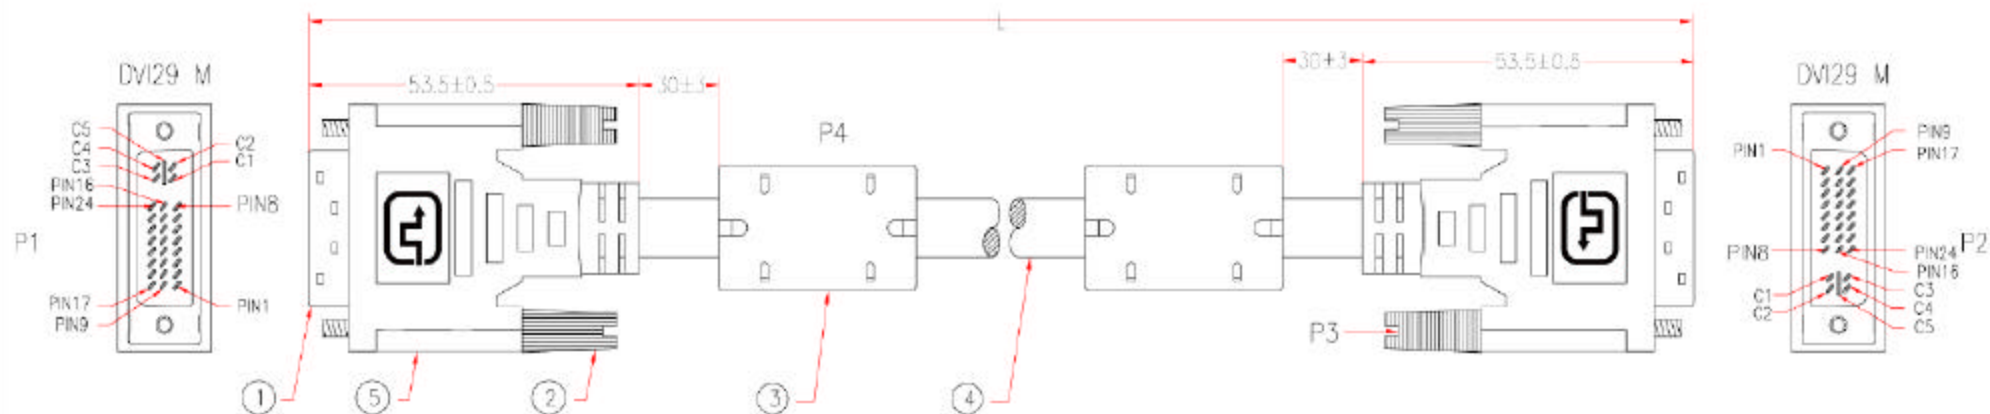

NOTE: All relevant materials are complied with RoHS directive .

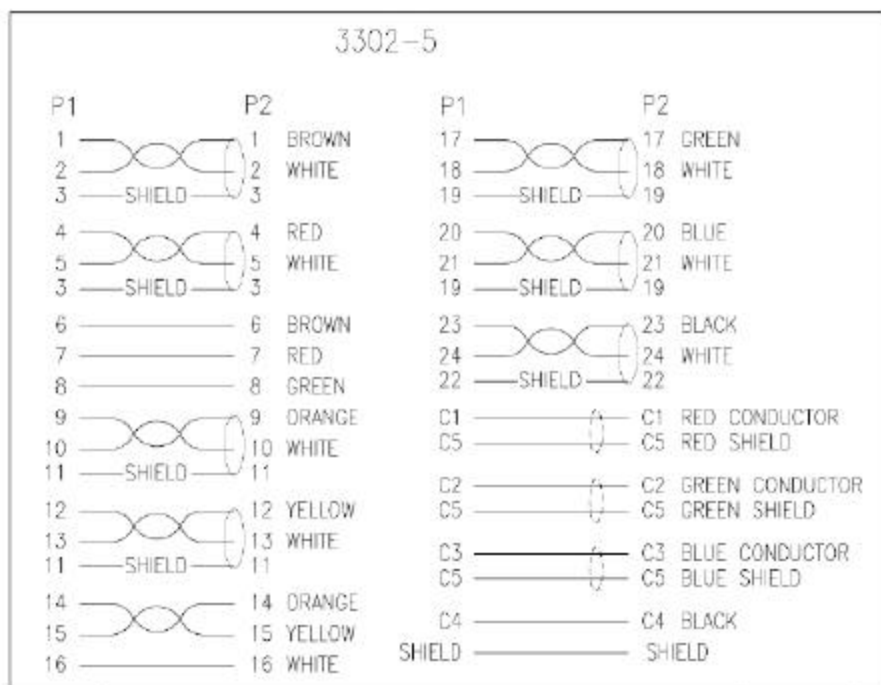

No.	DESCRIPTION	Q'TY	Supplier
5	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING NO. EH002601C-013	2	M304
	BLACK HEAT SHRINK TUBE $\varnothing 0.8 \times 4$ mm	14	M743
	BLACK HEAT SHRINK TUBE $\varnothing 1.0 \times 20$ mm(2pcs) & $\varnothing 1.0 \times 3$ mm(6pcs)	8	M743
	BLACK HEAT SHRINK TUBE $\varnothing 1.5 \times 2$ mm	14	M743
	BLACK HEAT SHRINK TUBE $\varnothing 2.0 \times 4$ mm	14	M743
	DVI29 PINPLATE	2	M935
	ASSEMBLY PVC BOOT, COLOR BEIGE	2	M304
4	UL20276 [3 MINI COAXIAL 30AWG+(28AWG*1PAIR+D+FAWD*7PCS+28AWG*1PAIR+28AWG*5C)+AM AMA BRAID, OD 9.5mm, JACKET BEIGE	L=20mm	M2
3	FERRITE CORE 17.5*28.5*10.5mm	2	M113
	MOLDED PVC BEIGE		M304
2	MOLDED THUMBSCREW #4-40, LENGTH 44.25mm, BEIGE	4	M95
1	DVI29 MALE, GOLD PLATING ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	2	M1

APPROVED		SFCABLE.COM	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ± 10 mm 201~1000mm ± 20 mm 1001 ~1500mm ± 25 mm 1501~2100mm ± 30 mm 2100mm ± 40 mm		
CHECKED	HU				
DRAWING	XIANG				
DATE	25/SEP/08	ITEM NO.	DVIIF-XXMM	UNIT:mm	

CHECKED