


LTR		REVISION	DATE	APPROVED
A		NEW RELEASE	05/12/95	H.T.

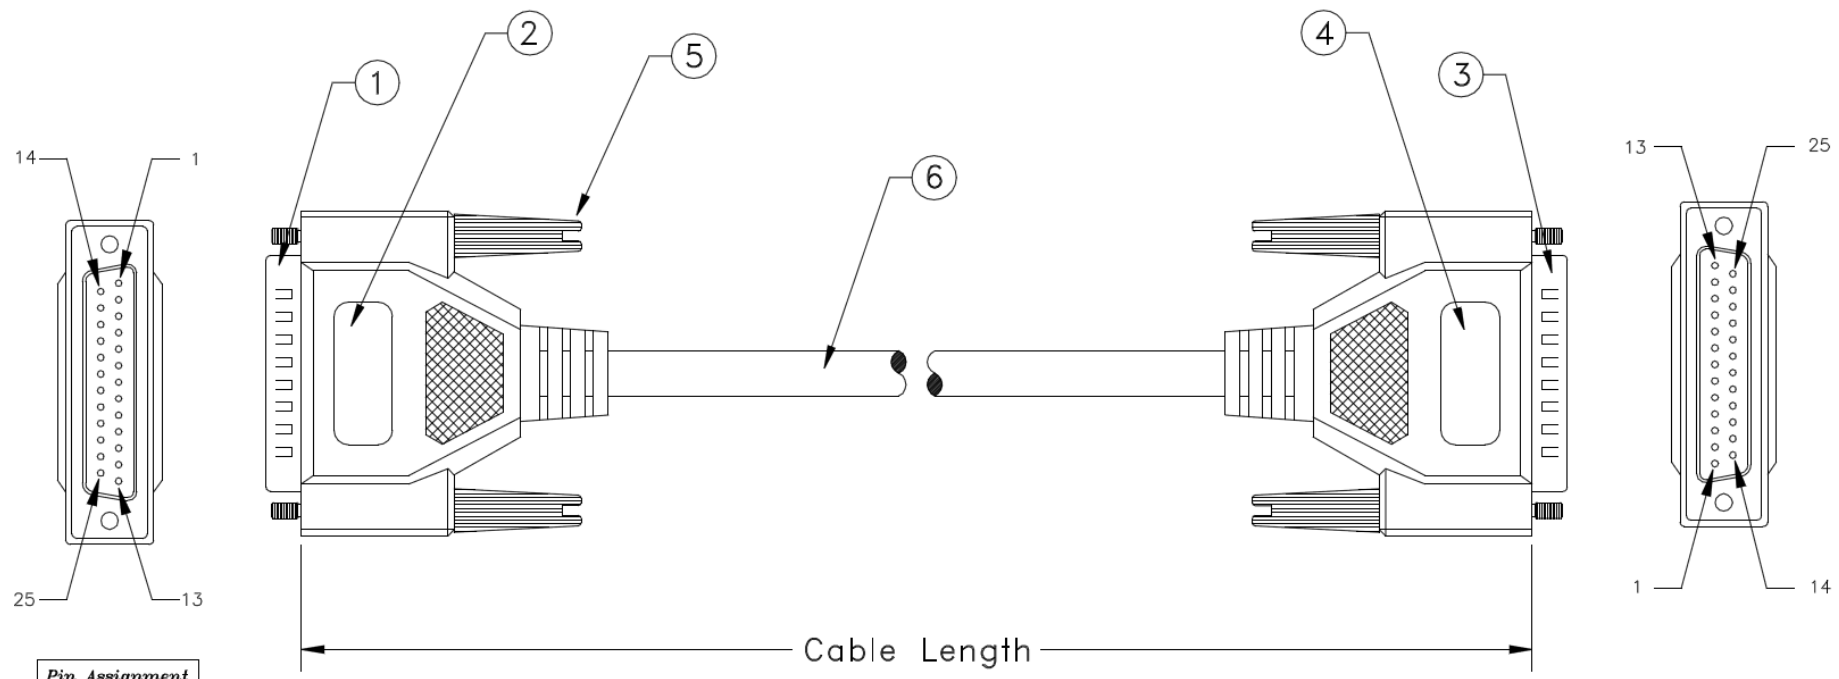

Pin Assignment

DB25 Male	DB25 Male
1	1
2	15
3	13
4	12
5	10
6	11
10	5
11	6
12	4
13	3
14	14
15	2
16	16
17	17
25	25
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 25 Pin Male w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 25 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS ARE IN INCHS
 2. TOLERANCES: DECIMALS X.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	05/12/95
CHECKED	
CUSTOMER APPROVAL	

SFCABLE.COM			
TITLE 2 Heads LapLink Cable Assembly (DB25, M/M, 15C, Molded)			
SIZE	DWG. NO.	PART NO.	REV.
		LS10-XX	A
SCALE	RELEASE DATE	SHEET	OF
NONE	05/12/95	1	1