
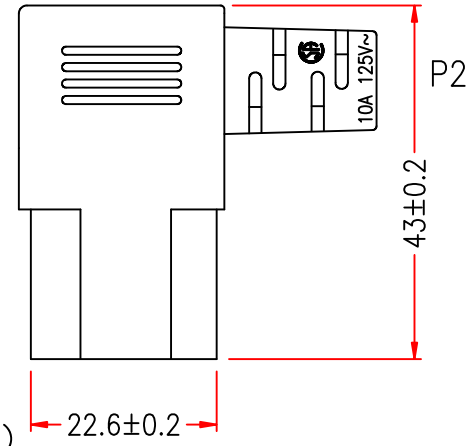
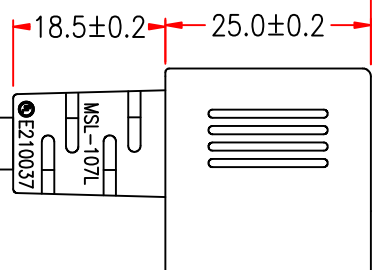
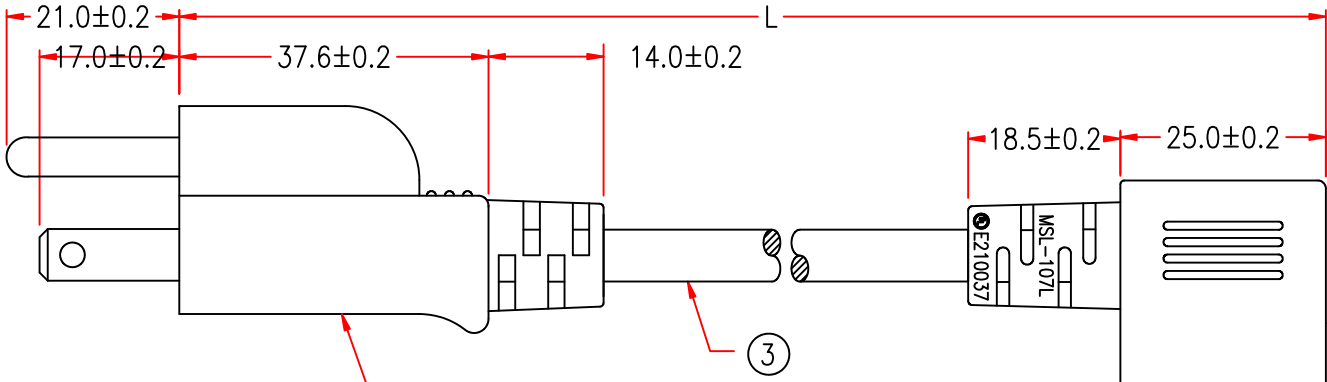


P1: M-003


P2: M-006

Customer No.:



NEMA 5-15P (MSL-105)

IEC 320 C13 (MSL-107L)

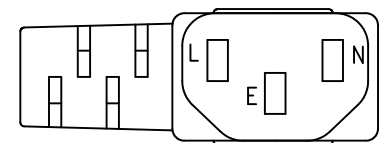

P1.P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978 CSA

SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	—————	L
WHITE	N	—————	N
GREEN	E	—————	E

3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK DRAWING No.EPSVT011803C-008	H5TB02-0304K09	L	M304
2	MOLDED PVC BLACK, 35P	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
1	TERMINAL: 2*4mm, 98744BS-0/A	A1QB24-0257	3	M257
	MOLDED PVC BLACK, 35P	H1BC02-0304K09		M304
	BRACKET: YS-002	A1QC07-0767	1	M767
1	TERMINAL: 98661BS-1	A1QB01-0257	2	M257
	TERMINAL: ø4.75mm, 98475BS-1	A1QB06-0257	1	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	22/JAN/16			
DRAWING	LIU	22/JAN/16	PRODUCT NO.	P7CR-LAXX	UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm