
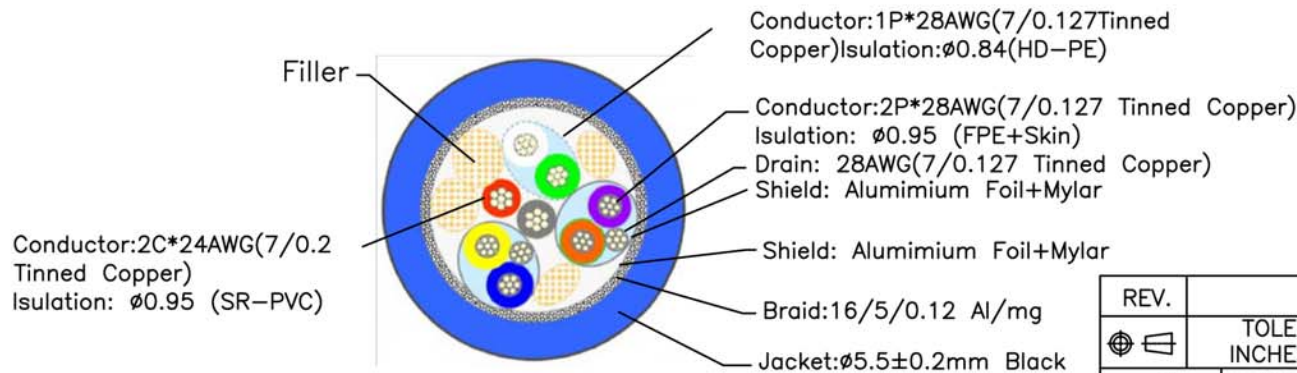


Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 300V DC/10ms

Pin Assignment

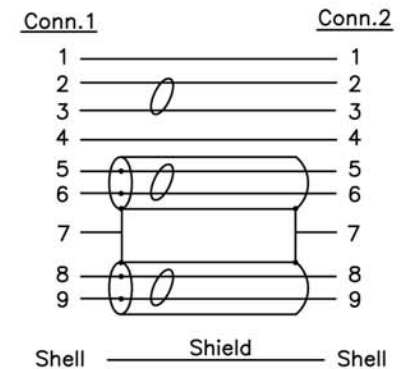

REV.	DESCRIPTION			DATE
④	TOLERANCE			
③	INCHES M/M			
②	.X	.015	.30	
①	.XX	.010	.10	
	.XXX	.005	.05	TITLE: USB 3.0 AM TO BM Cable
	DRAWN BY	Henry		CUSTOMER :
	CHECK BY			CUSTOMER NO.:
	APPD BY			SCALE NONE
		UNIT	MM	DRAWING NO.:
		DATE	10.09.02	USB3-AB-15
				REV. A
				1/1

NO.	DESCRIPTION	Q'TY	UNIT
④	Outside Molding: 45P PVC Color: Black	16	g
③	USB 3.0 B Type M Pin Gold Plated, Shell Nickel, Blue Insulation	1	Set
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	1	Set
①	Super High Speed USB 3.0 Cable UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P+7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M