

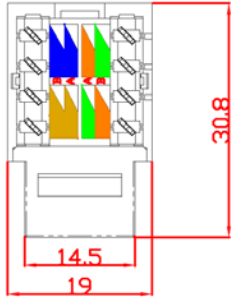
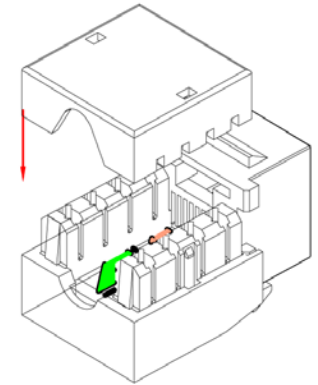






DATE	REV.	REVISION	DRAFTING	CHECKED
06.09.14	A/0	NEW	湯欣之	

**Cat.5e Keystone**



**Cat.6 Keystone**

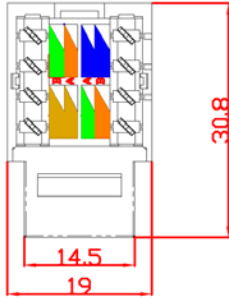

**SPECIFICATION**

- Housing material: PC UL 94V-0 rated, Insert material: PC UL 94V-0 rated.  
Contact Finished: 50 micro-inch gold over, Nickel 50-60 micro-inch.
- IDC Housing: PC UL 94V-0 white color.  
IDC Terminal: Phosphor Bronze, nickel plated 50-60 micro-inch.
- Jack Housing Color: Black
- P.C.B: FR4 1.6m/m thickness, 2 layers.
- I.D.C CAP: PC UL 94V-0 white color.
- Certifications: ETL component ;UL listed ; ANSI/TIA/EIA-568-B.2; ISO/IEC 11801 ClassE;FCC.
- Supports: Dual T568A & T568B wiring compatible with Category 5 enhanced requirement.
- Tool : Krone 、 AT&T ( 110 Type) .
- Optional Parts : Dust cover.

**Color Coding Information**

**T568B**

**T568A**

IDC terminal	color code	IDC terminal	color code
PIN.5	WHITE/BLUE	PIN.5	WHITE/BLUE
PIN.4	BLUE	PIN.4	BLUE
PIN.1	WHITE/ORANGE	PIN.1	WHITE/GREEN
PIN.2	ORANGE	PIN.2	GREEN
PIN.3	WHITE/GREEN	PIN.3	WHITE/ORANGE
PIN.6	GREEN	PIN.6	ORANGE
PIN.7	WHITE/BROWN	PIN.7	WHITE/BROWN
PIN.8	BROWN	PIN.8	BROWN

Unless specified on the drawing, tolerances are per the follows:

- . ±1
- .X ±0.2
- .XX ±0.05

**SF CABLE, INC**

DRAW.NO		DESC.	Cat.5e/Cat.6 90° Unshielded Keystone Jack black		
DEPARTMENT	PM	DRAW	湯欣之	DATE	06.09.14
SCALE		APPROVED		DATE	
UNIT	mm	SHEET	1 OF 1		

Material		Part Number	101603 101703	Note		3RD		
----------	--	-------------	------------------	------	--	-----	--	--