

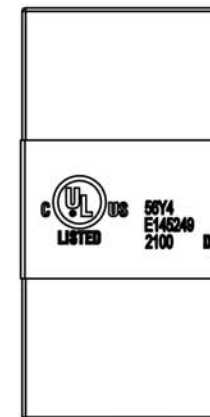
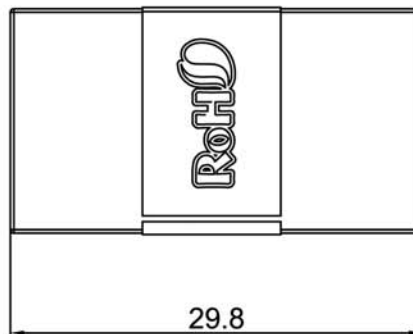


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

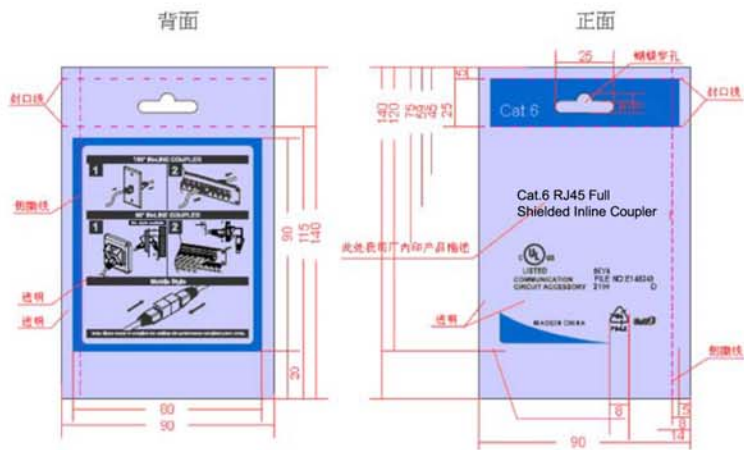

56Y4
E145249

RoHS

UL LISTED
COMMUNICATION
CIRCUIT ACCESSORIES

MATERIAL

PLASTIC HOUSING : ABS high-impact UL94V-0 thermoplastic
 PHYSICAL CHARACTERISTICS
 OPERATING TEMPERATURE RANGE : -10 C TO 60 C
 STORAGE TEMPERATURE RANGE : -40 C TO 68 C
 HUMIDITY : 10%~90%RH

ELECTRICAL

IMPEDANCE: 75 ohm
 FREQUENCY RANGE: 0~2 GHz
 WORKING VOLTAGE: 250 VRMS max.
 DIELECTRIC WITHSTANDING VOLTAGE: 500VRMS min.
 VSWR: 1.35 max
 CONTACT RESISTANCE: 1.Center Contact: 5 Milliohms Max.
 2.Outer Contact: 1 Milliohms Max.
 INSULATOR RESISTANCE: 1000 Megohms min.

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

SFCABLE.COM			
DRAWN BY	LJIANWEI	DATE:	2013/5/13
CHECKED BY		SHEET	1 of 1
APPROVED BY		DESCRIPTION:	Cat6 RJ45 Full Shielded Inline Coupler
		ITEM NO.	1020-SF-11
		REV.	00
		UNIT:	mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				