
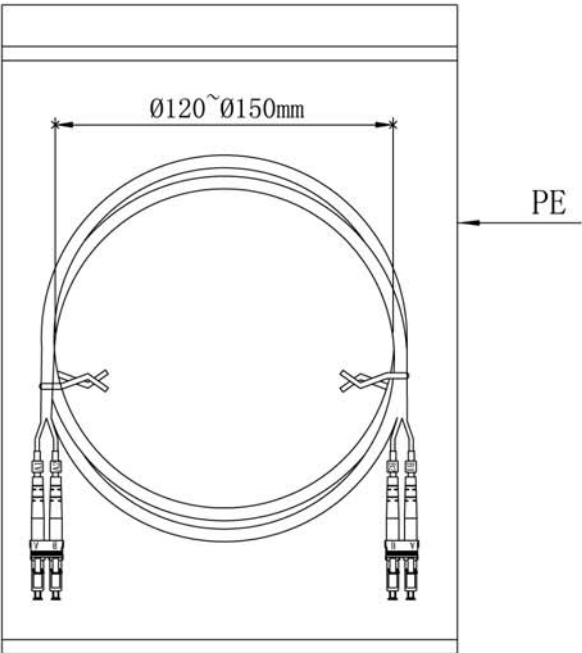


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

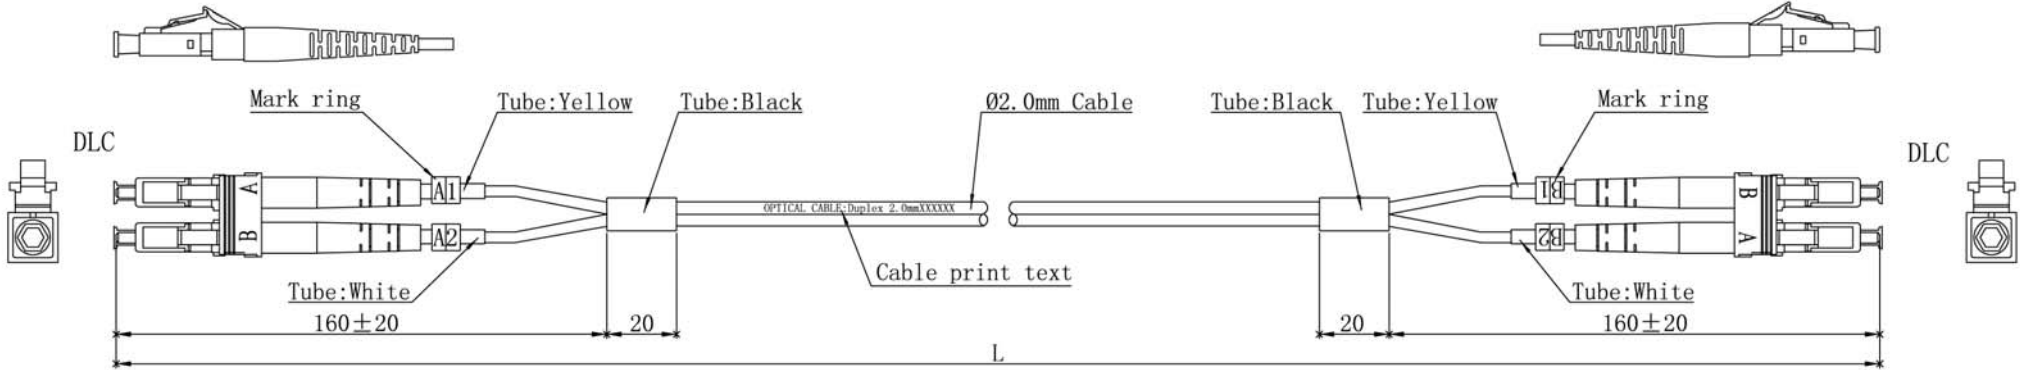

Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM3
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Aqua
Cable Diameter (mm)	$\varnothing 2.0$
Operating Temperature ($^{\circ}\text{C}$)	$-40 \sim +75$
Storage Temperature ($^{\circ}\text{C}$)	$-40 \sim +85$
Insertion loss (dB)	$\leq 0.2\text{dB}$
Return loss (dB)	$\geq 35\text{dB}$

$L \leq 5\text{m}$, TOLERANCES: $0 \leq \Delta L \leq 5\text{cm}$
$L > 5\text{m}$, TOLERANCES: $0 \leq \Delta L \leq 1\% * L$



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 .x +0.2
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-LC-DX OM3 Patchcord
CHECKED BY	SHEET 1 of 1	
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm