
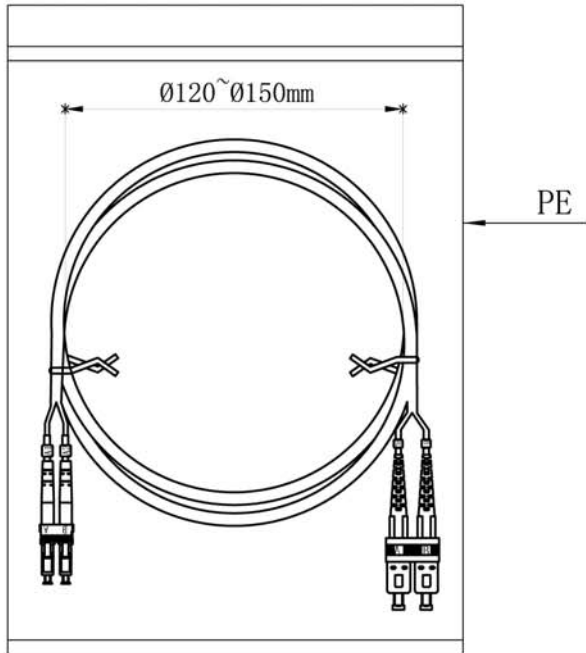


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

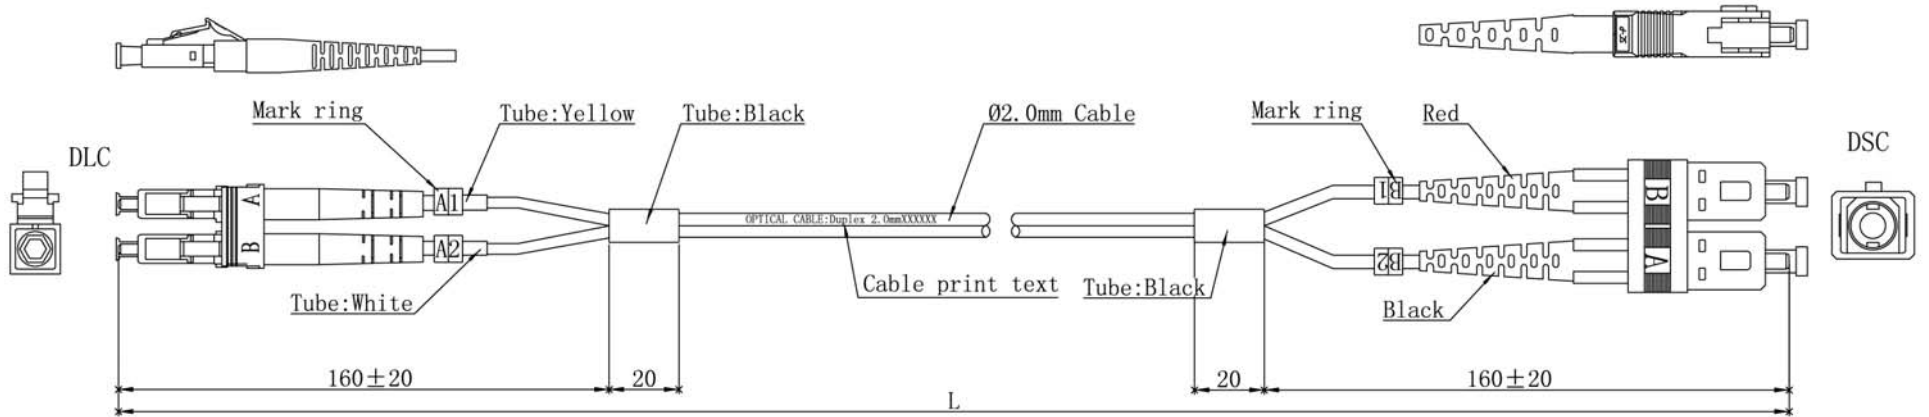

Specifications:

Type	DLC/UPC-DSC/UPC
Fiber Mode	OM3
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Aqua
Cable Diameter(mm)	Ø2.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB
SC Connector Color(Boot)	Red/Blcak

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm  
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%\*L

Length	Item#
1m	1026-SF-21
1.5m	1026-SF-87
2m	1026-SF-22
3m	1026-SF-23
4m	1026-SF-89
5m	1026-SF-24
6m	1026-SF-90
7m	1026-SF-91
8m	1026-SF-92
9m	1026-SF-93
10m	1026-SF-25
12m	1026-SF-94
15m	1026-SF-26
50m	1026-SF-27
100m	1029-SF-93
150m	1029-SF-94



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:  
 .x +1  
 .x +0.2  
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-SC-DX OM3 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm