
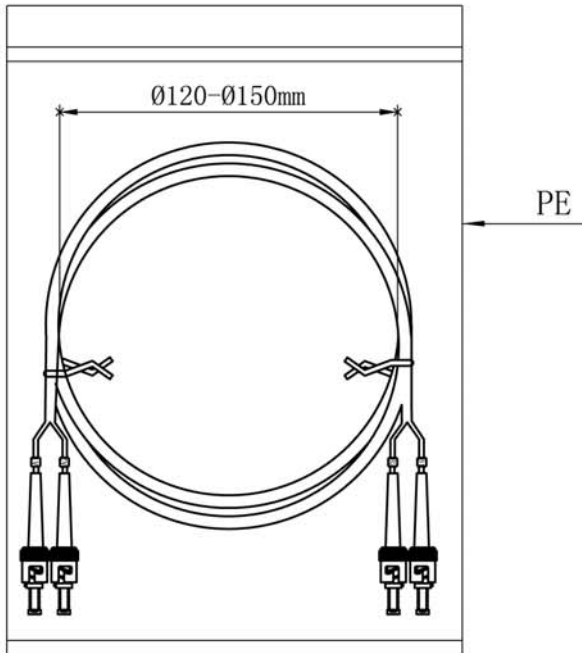


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

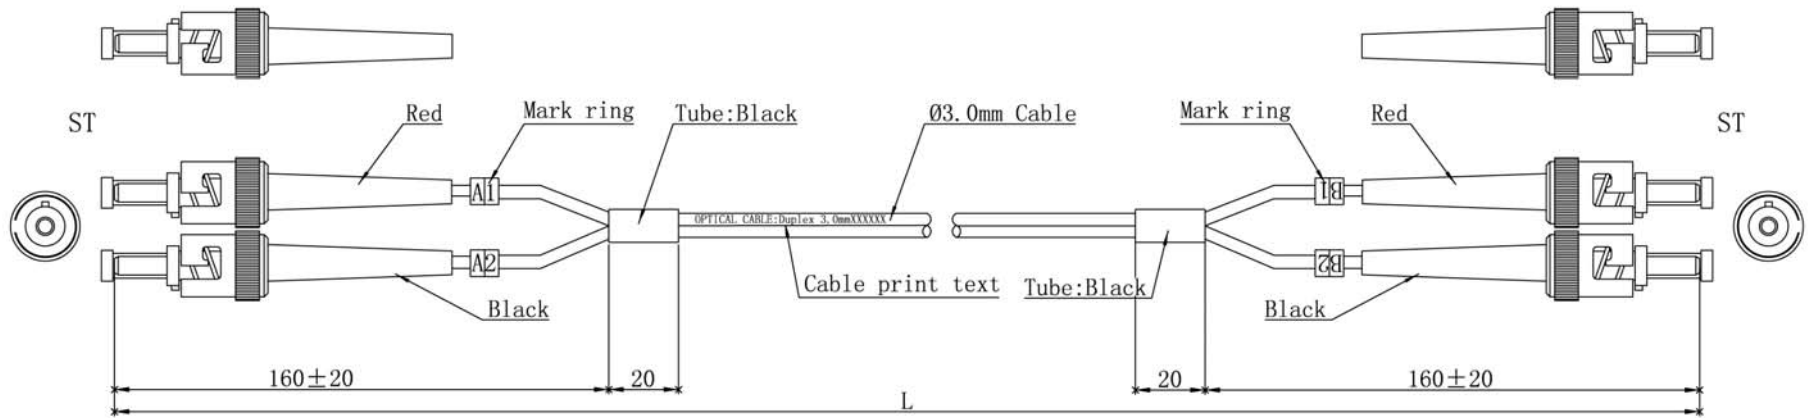

Specifications:

Type	ST/UPC-ST/UPC
Fiber Mode	OM3
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Aqua
Cable Diameter(mm)	Ø3.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB
ST Connector Color(Boot)	Red/Blcak

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
$L > 5m$, TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

LENGTH	ITEM NO
1M	1026-SF-46
2M	1026-SF-47
3M	1026-SF-48
5M	1026-SF-49
10M	1026-SF-50
15M	1026-SF-51



①					
②					
③					
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT	

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 .x +0.2
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: ST-ST-DX OM3 Patchcord
CHECKED BY	SHEET 1of1	
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm