



|        |         |
|--------|---------|
| P1,P2: | M-Y269A |
|        | M-269A  |
| P3:    | M-426C  |
| P4:    | M-323A  |

REV.1 2004.01.08

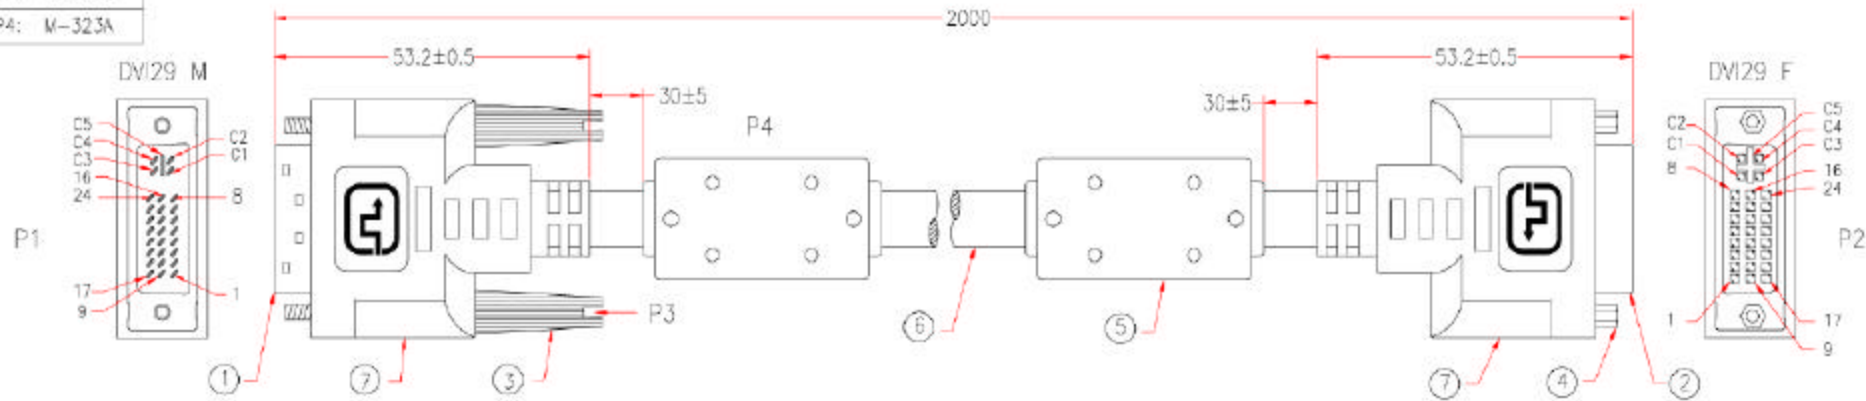

3334

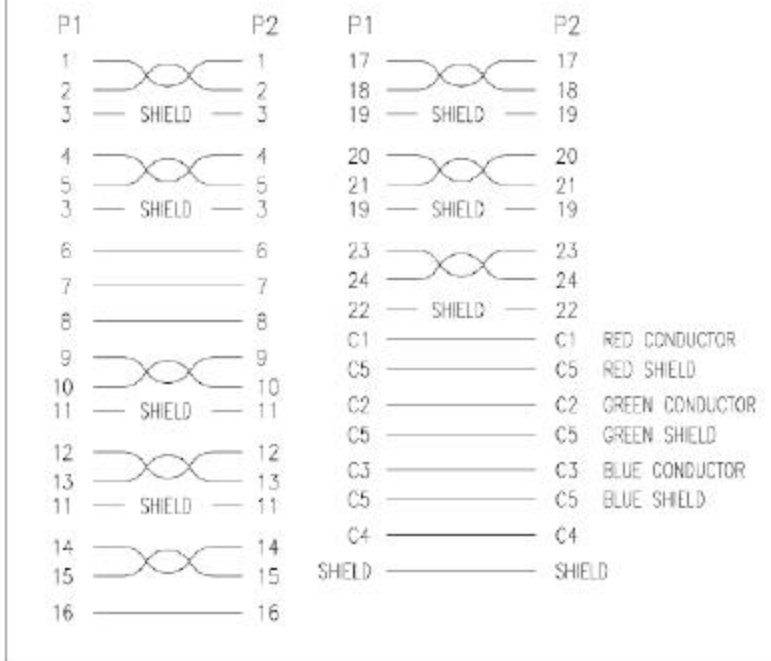

| No. | DESCRIPTION  | Q'TY   | Supplier |
|-----|--|--------|----------|
| 7   | UL1061 26AWG INSULATOR, LENGTH 28mm  | 2      | M304     |
|     | BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10$ mm   | 6      | M519     |
|     | BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10$ mm   | 54     | M519     |
|     | COPPER FOIL 7.5*30mm   | 2      | M309     |
|     | COPPER FOIL 3.3*90mm   | 2      | M309     |
|     | MOLDED PE COLOR TRANSPARENT  |        | TWN      |
|     | MOLDED PVC BEIGE   |        | M304     |
| 6   | UL20276 3 MINI COAXIAL 30AWG+(28AWG*1PAIR)*7pcs+28AWG*1PAIR+(28AWG*5C), ALUM-WYLAR FOIL AND COPPER BRAID SHIELDING, OD 9.5mm, JACKET BEIGE | 2000mm | M298     |
| 5   | FERRITE CORE 17.5*28.5*10.5mm  | 1      | M113     |
|     | MOLDED PVC BEIGE   |        | M304     |
| 4   | HEX-UNT 4.75*10mm AND PAD  | 2set   | M95      |
| 3   | MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE  | 2      | M95      |
| 2   | DVI 29 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR   | 1      | M60      |
| 1   | DVI 29 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR   | 1      | M60      |

|          |       |                    |  |
|----------|-------|--------------------|--|
| APPROVED |       | <b>SFCABLE.COM</b> | Cable Length Unless Other Spec.<br>Tolerances:<br>0 ~0.2M ±0.01M<br>0.21~1.0M ±0.02M<br>1.1 ~1.5M ±0.025M<br>1.51~2.1M ±0.03M<br>2.1M ↑ ±0.04M |
| CHECKED  | TIAN  |                    |  |
| DRAWING  | BETTY | ITEM NO.           | 10DV-09202   |