
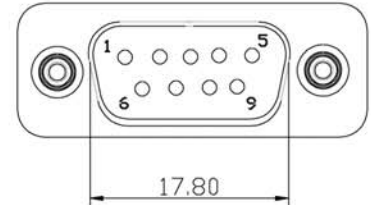
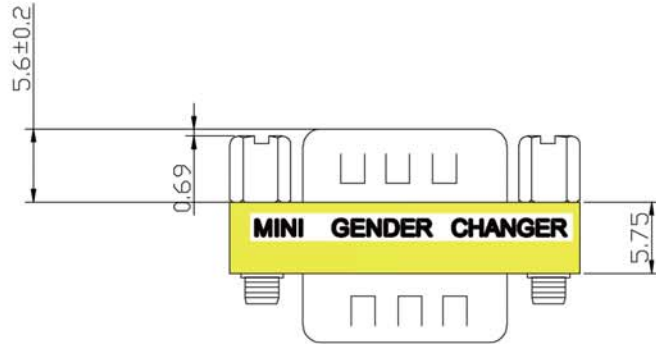
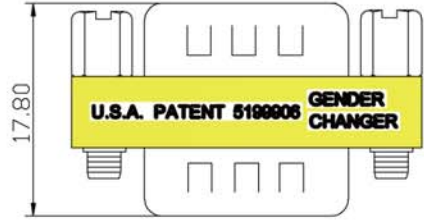
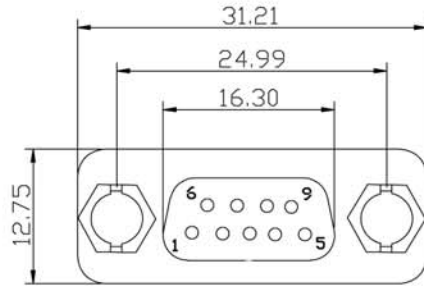


Product Name	DB 9 Male to Male Adapter
Product Numbers	10GC-D1

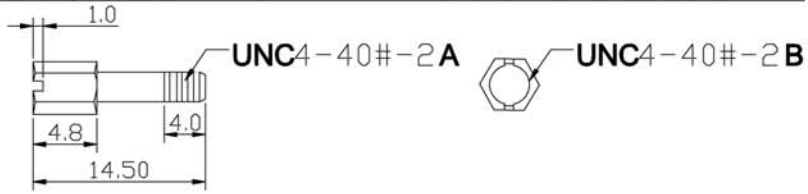

PIN ASSIGNMENT

DB9M	DB9M	DB9M
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
9	_____	9

Specification:
Rating Current: 3 AMP
Insulation Resistance: 1000M Ohm min. at 500V DC
Dielectric Strength: 1000V AC for one minute.
Temperature: -55°C~+105°C
Contact: Brass Gold flash over Nickel Plated
Shell: SPCC Nickel Plated
Insulator: PBT+30%GF UL94V-0 Blue
Screw: Steel 12L14 Nickel Plated
Label: Yellow color black character
One Side: MINI GENDER CHANGER
Other Side: U.S.A PATENT 519906 GENDER CHANGER

REV.	DESCRIPTION		DATE
①	TOLERANCE INCHES	M/M	SFCABLE.COM
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	TITLE: 10GC-D1
DRAWN BY	Dawson		DB 9 Male to Male Adapter
CHECK BY		SCALE	NONE
APPD BY		UNIT	MM
		DATE	2013.03.08
		DRAWING NO:	
		REV. A	1/3