
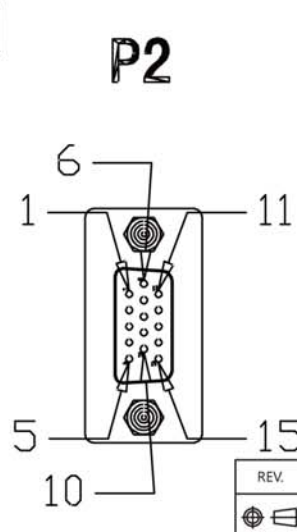
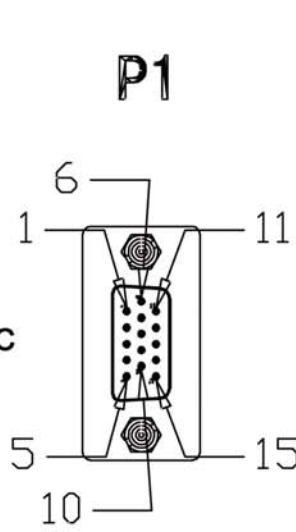
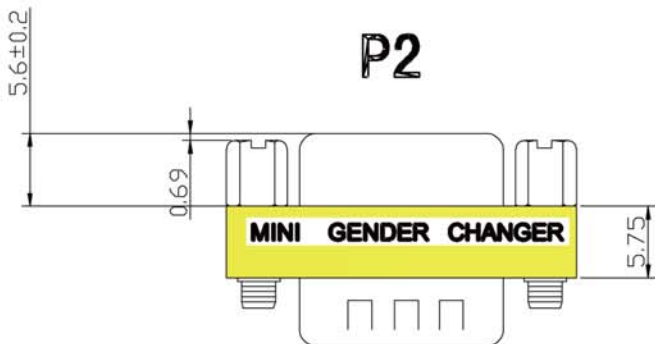
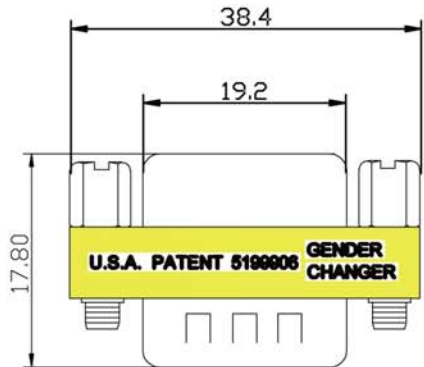


Product Name	VGA Male to Female adapter
Product Numbers	10GC-F2

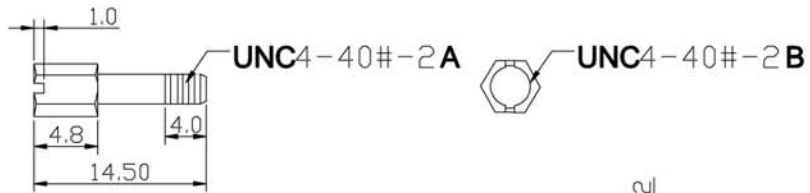

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15

iron housing _____ iron housing

Specification:
Rating Current: 3 AMP
Insulation Resistance: 1000M Ohm min. at 500V DC
Dielectric Strength: 1000V AC for one minute.
Temperature: -55°C~+105°C
Contact: Brass Gold flash over Nickel Plated
Shell: SPCC Nickel Plated
Insulator: PBT+30%GF UL94V-0 Blue
Screw: Steel 12L14 Nickel Plated
Label: Yellow color black charactor
One Side: MINI GENDER CHANGER
Other Side: U.S.A PATENT 519906

GENDER CHANGER

REV.	DESCRIPTION		DATE
⊕	TOLERANCE INCHES	M/M	SFCABLE.COM
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	TITLE: 10GC-F2
DRAWN BY	Dawson		VGA Male to Female adapter
CHECK BY		SCALE	NONE
APPD BY		UNIT	MM
		DATE	2013.03.08
		DRAWING NO:	
		REV.	A
			1/3