
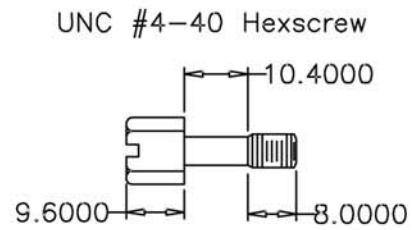
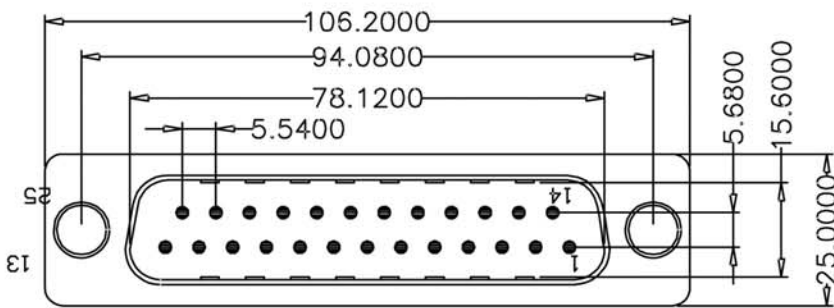
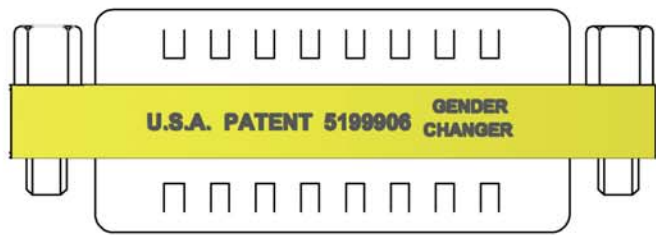


Product Name	DB 25 male to male adapter
Product Numbers	10GC-G1

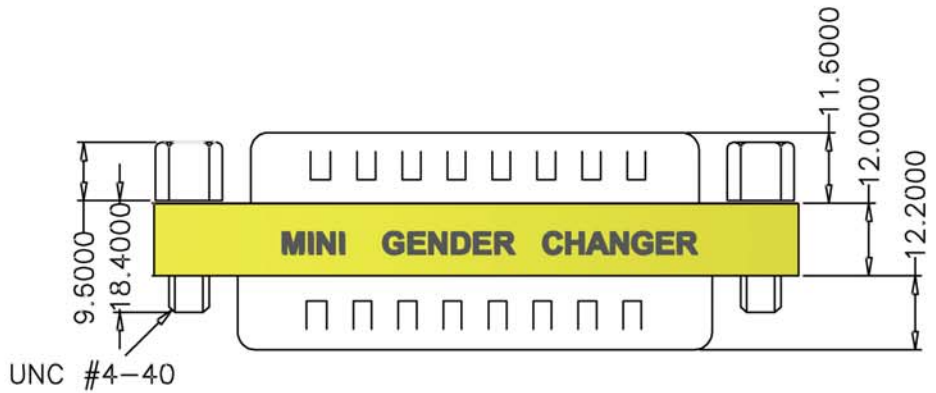

PIN ASSIGNMENT

DGC 25 M/M GENDER CHANGER  
PIN OUT: 25Male

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

**Specification:**  
**Rating Current: 3 AMP**  
**Insulation Resistance: 1000M Ohm min. at 500V DC**  
**Dielectric Strength: 1000V AC for one minute.**  
**Temperature: -55°C~+105°C**  
**Contact: Brass Gold flash over Nickel Plated**  
**Shell: SPCC Nickel Plated**  
**Insulator: PBT+30%GF UL94V-0 Blue**  
**Screw: Steel 12L14 Nickel Plated**  
**Label: Yellow color black character**  
**One Side: MINI GENER CHANGER**  
**Other Side: U.S.A PATENT 519906 GENDER CHANGER**

REV.	DESCRIPTION		DATE
①	TOLERANCE INCHES	M/M	SFCABLE.COM
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	TITLE: 10GC-G1
DRAWN BY	Dawson		DB 25 male to male adapter
CHECK BY	SCALE	NONE	DRAWING NO:
APPD BY	UNIT	MM	
	DATE	2013.03.08	REV. A 1/3