
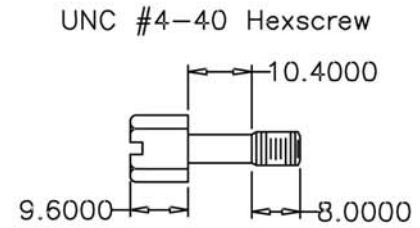


Product Name	DB 25 Male to Female Adapter
Product Numbers	10GC-G2

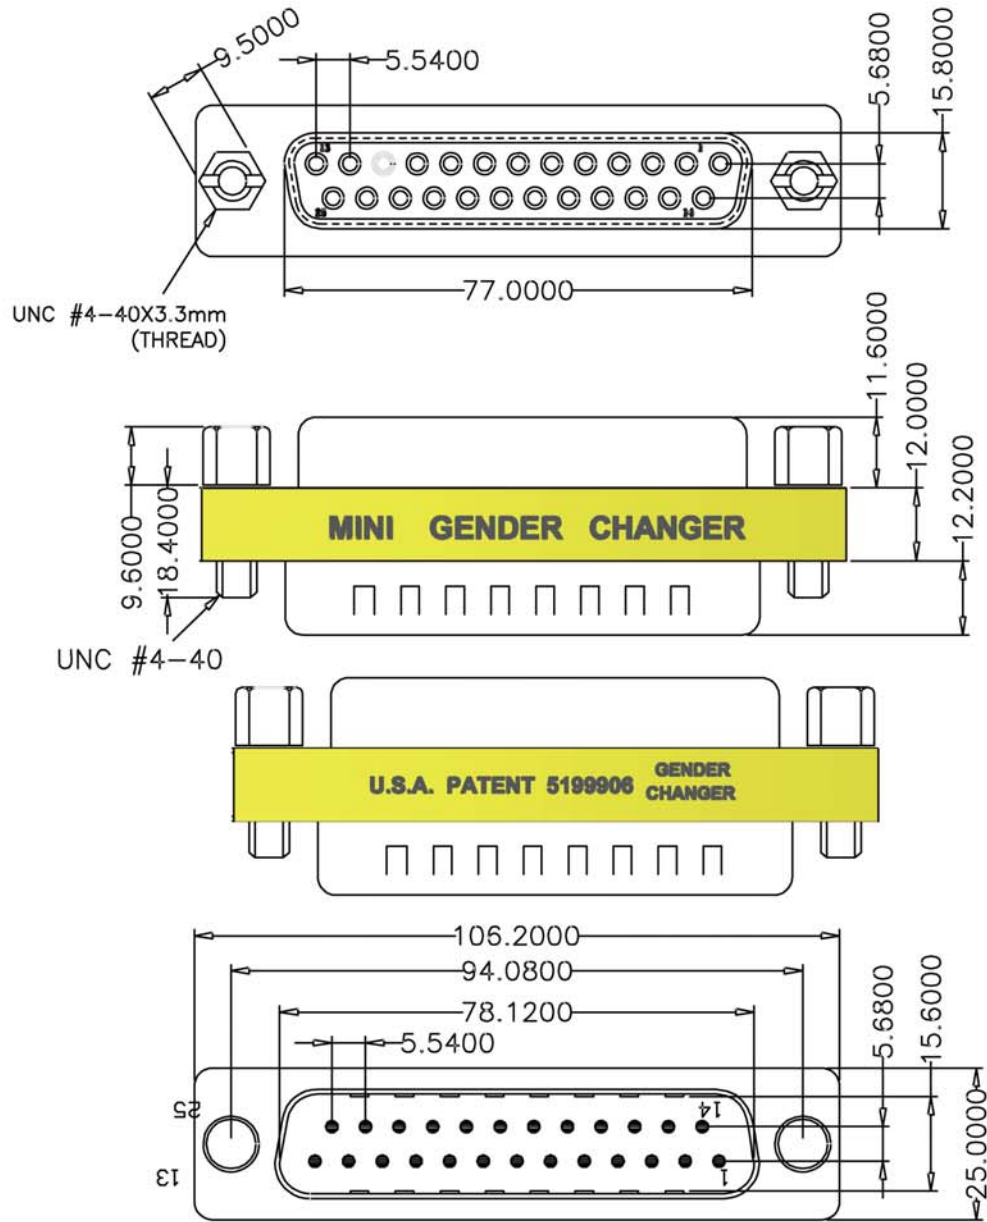

PIN ASSIGNMENT

DGC 25 M/F GENDER CHANGER

PIN OUT: 25Male		25Female
1	-----	1
2	-----	2

24	-----	24
25	-----	25
G	-----	G

Specification:

Rating Current: 3 AMP

Insulation Resistance: 1000M Ohm min. at 500V DC

Dielectric Strength: 1000V AC for one minute.

Temperature: -55°C~+105°C

Contact: Brass Gold flash over Nickel Plated

Shell: SPCC Nickel Plated

Insulator: PBT+30%GF UL94V-0 Blue

Screw: Steel 12L14 Nickel Plated

Label: Yellow color black character

One Side: MINI GENER CHANGER

Other Side: U.S.A PATENT 519906

GENDER CHANGER

REV.	DESCRIPTION		DATE
	TOLERANCE INCHES M/M		SFCABLE.COM
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	TITLE: 10GC-G2
DRAWN BY	Dawson		DB 25 Male to Female Adapter
CHECK BY	SCALE	NONE	DRAWING NO:
APPD BY	UNIT	MM	REV. A
	DATE	2013.03.08	1/3