

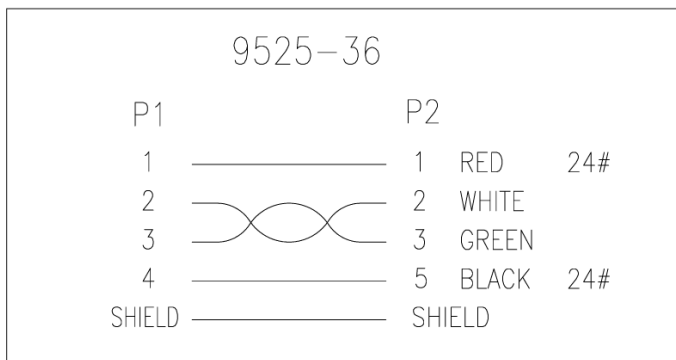


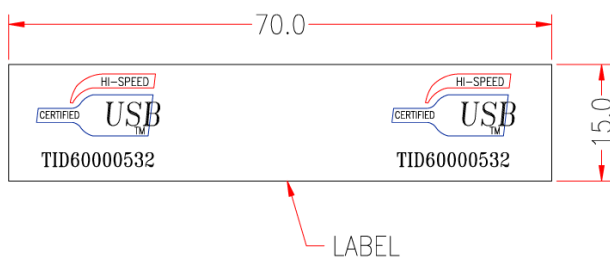


P1: M-942A

P2: M-971C

Customer No: No.1

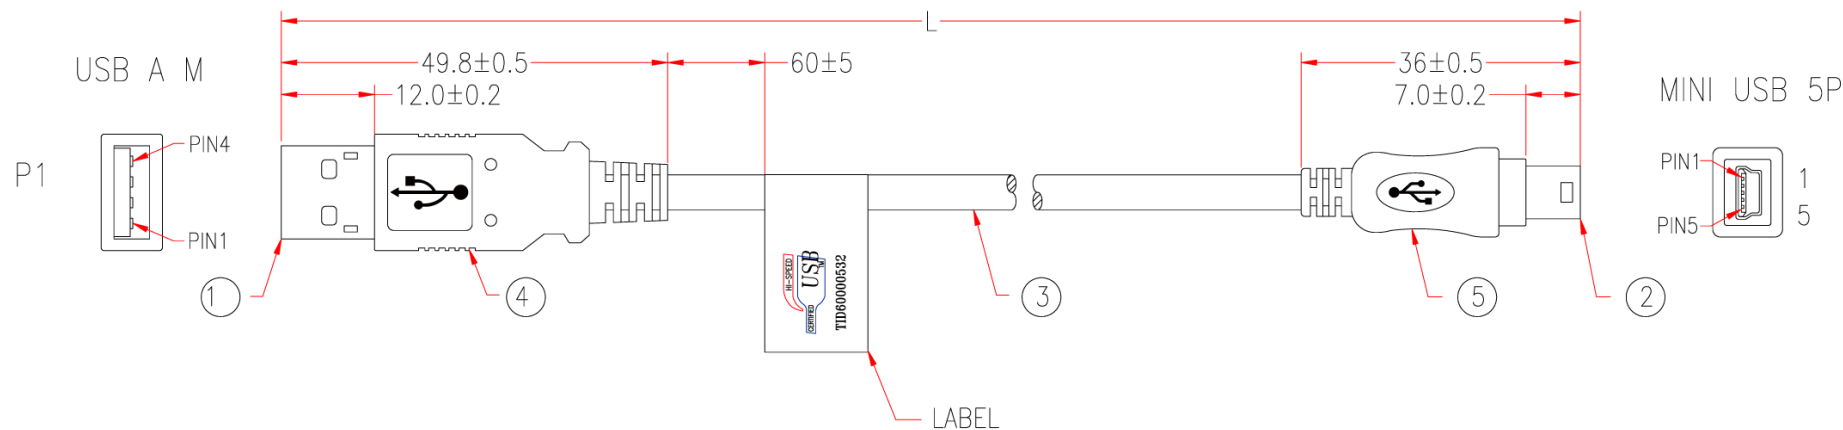

NOTE: All relevant materials are complied with RoHS directive .

| 5 | BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5\text{mm}$ | A4HA23-0743 | 4 | M743 |
|----------|---|---|---|----------|
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 4 | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 3 | USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 24AWG,OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EUAB2801P2402C-139 | H5KH29-0304K09 | L-20mm | M304 |
| 2 | MINI USB 5P MALE 2.0, GOLD FLASH ON CONTACTS, BLACK INSULATOR | A1HE31-0108 | 1 | M108 |
| 1 | USB A MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE | A1HA49-0108 | 1 | M108 |
| No. | DESCRIPTION | | Q'TY | Supplier |
| APPROVED | |  Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$ | | |
| CHECKED | HU | | | |
| DRAWING | PENG | | | |
| DATE | 25/APR/12 | | | |
| ITEM NO. | 10U2-151XX | UNIT:mm |   | |