


P1: M-942C

Customer No:


P2:

M-Y930A

M-930B

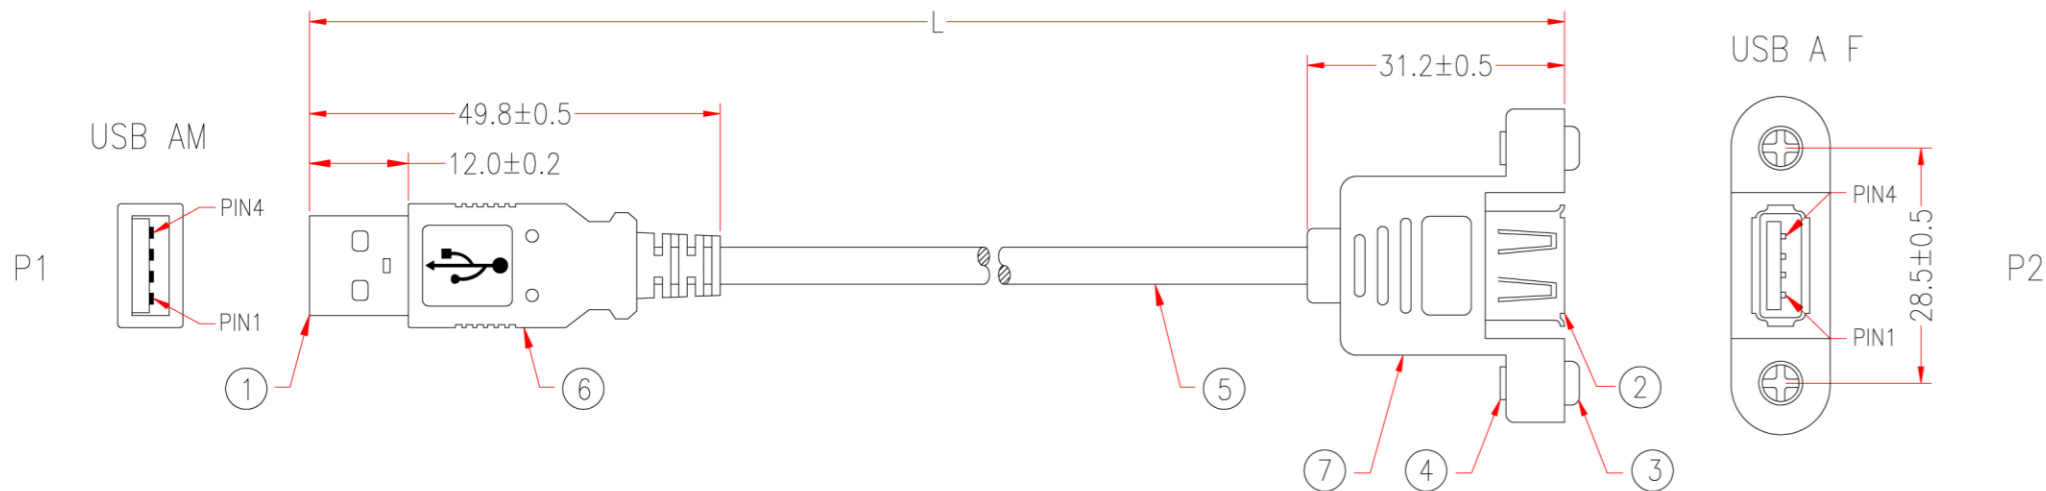

* NOTE: All relevant materials are complied with RoHS directive .

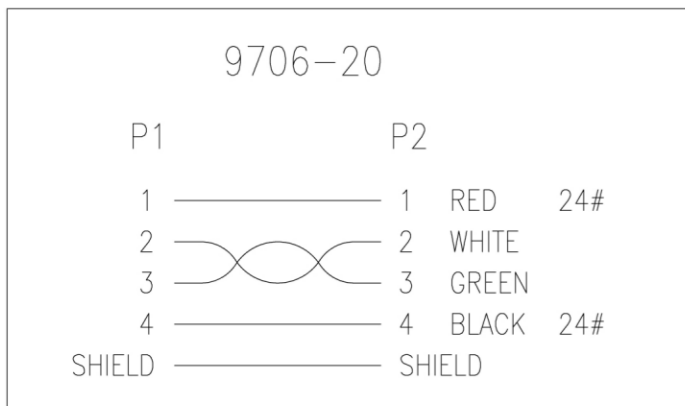

7	BLACK HEAT SHIRK TUBE ϕ 1.0*8mm	A4HA23-0959		M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304B01		M304
6	MOLDED PVC BLACK	H1BF01-0304B01		M304
5	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG,OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EUAB2801P2402C-139	A5BA02-0280	Xmm	M304
4	PEM-NUT 5*7.7mm	A6BC03-0095	2	M95
3	SCREW 5.5*8mm	A6AC01-0095	2	M95
2	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	A1HC21-0108	1	M108
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA49-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec.	
CHECKED	HU		Tolerances:	
DRAWING	PEGN		0 ~200mm	\pm 10mm
DATE	11/JUN/12	201~1000mm	\pm 20mm	
ITEM NO.	10U2-PM1XX-E	1001 ~1500mm	\pm 25mm	
UNIT:mm		1501~2100mm	\pm 30mm	
		2100mm↑	\pm 40mm	