




11.75(MIN)

$L \pm Tmm$

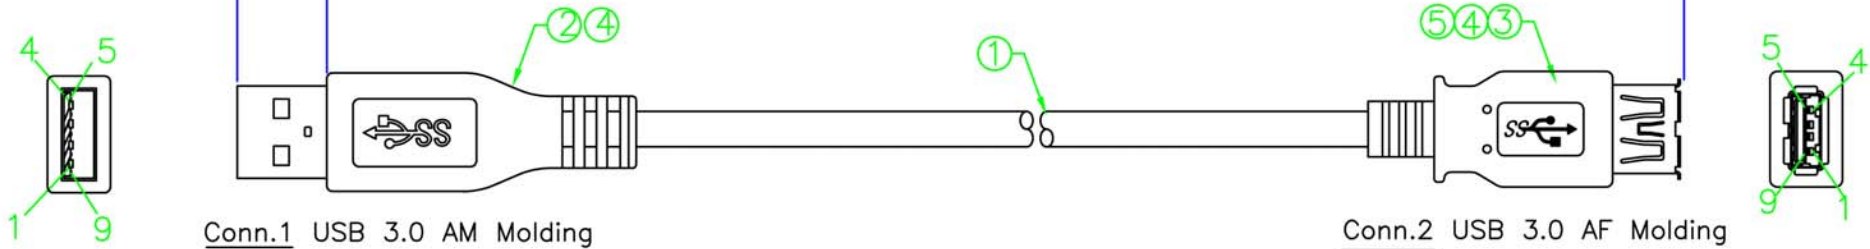

Conn.1 USB 3.0 AM Molding

Conn.2 USB 3.0 AF Molding

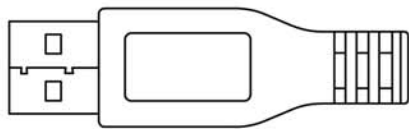



Tabel:

Length	Part No.
915±30mm	10U3-32103-E-BK
1830±40mm	10U3-32106-E-BK
3050±50mm	10U3-32110-E-BK
4575±50mm	10U3-32115-E-BK

Electrical Test:

- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 300V DC/10ms

Pin Assignment

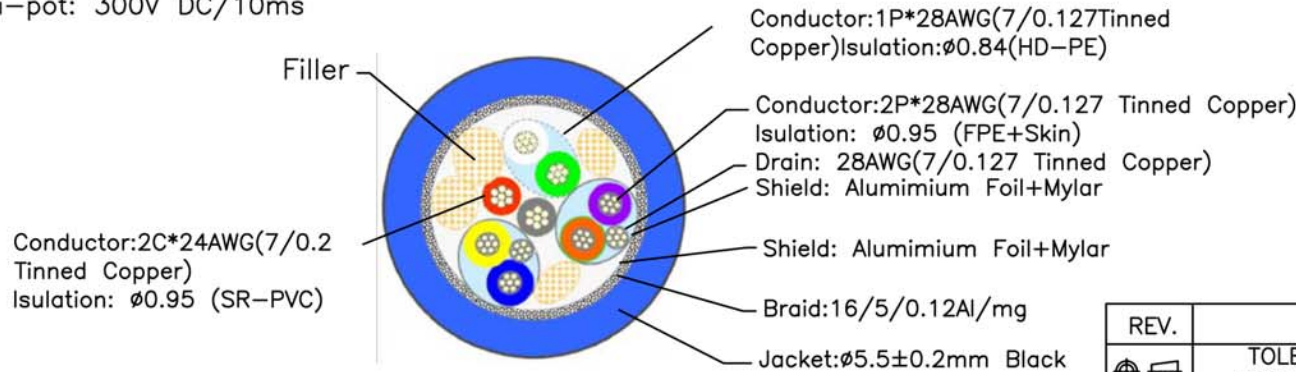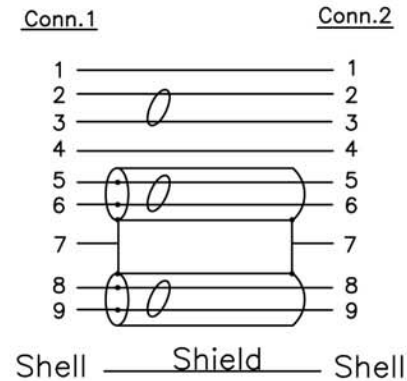

REV.	DESCRIPTION			DATE
⑤	TITLE: USB 3.0 AM TO AF Extension Cable			
④	CUSTOMER :			
③	CUSTOMER NO.:			
②	DRAWN BY: Henry			
①	CHECK BY:			
NO.	DATE: 10.09.02			DRAWING NO.: 10U3-321XX-E
				REV. A
				1/1

NO.	DESCRIPTION	Q'TY	UNIT
⑤	Inside Molding: PE	3	g
④	Outside Molding: 45P PVC Color: Black	16	g
③	USB 3.0 A Type F Pin Gold Plated, Shell Nickel, Blue Insulation	1	Set
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	1	Set
①	Super High Speed USB 3.0 Cable UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P +7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M

