



DATE	REV	DESCRIPTION	BY	CHKD

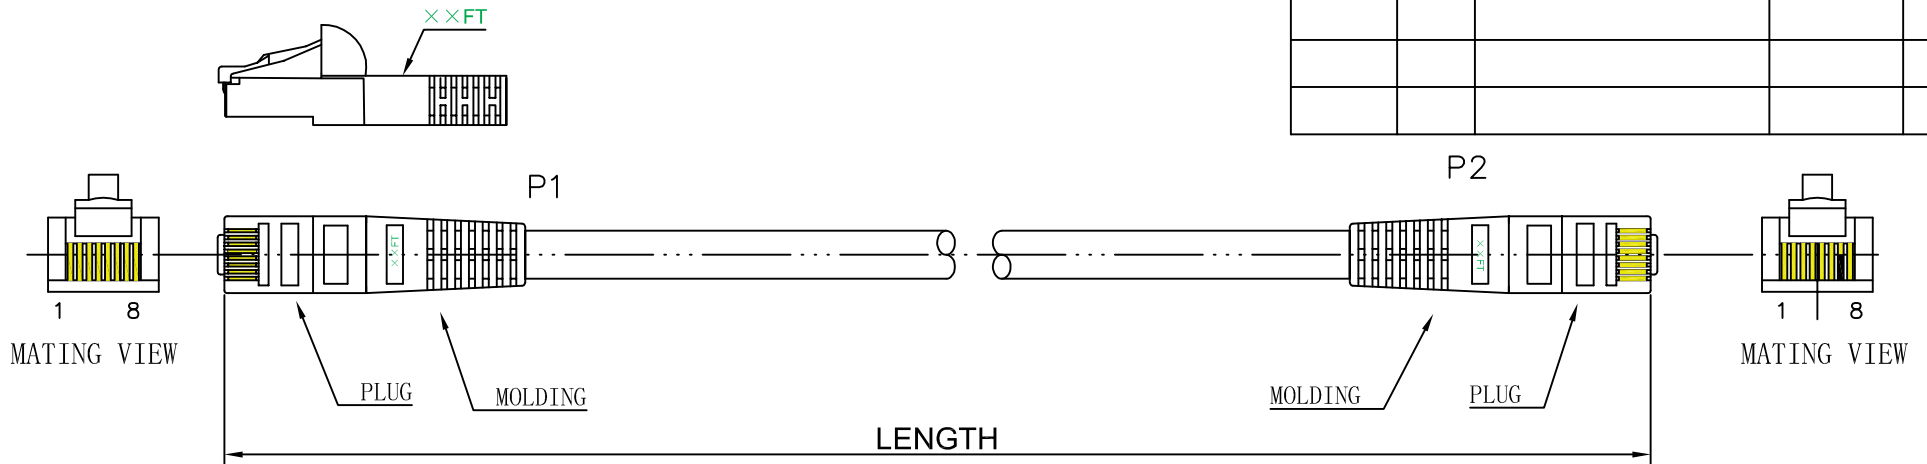

Marking: **YFC UTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED FOR GIGABIT ETHERNET 24AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3**

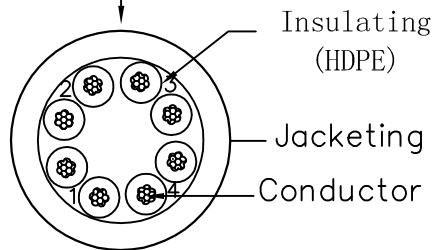


orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1 (T568A)	WIRE	P2 (T568B)
1	3	WHT/ORG	1
	6	ORG	2
2	1	WHT/GRN	3
	2	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacketing PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.2mm

WIRE	CAT.5E UTP STR 24AWG
PLUG	YUS-04
Length	××FT
WIRE COLOR	

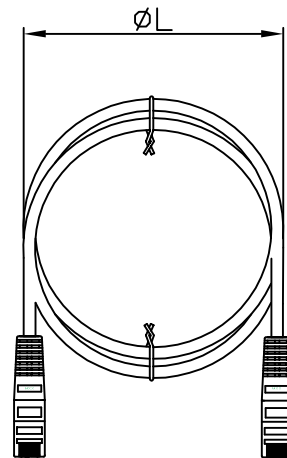

Unless specified on the drawing, tolerances are per the follows:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD

DRAW.NO	YUS-04	ITEM	CAT.5E UTP STR 24AWG	
DEPARTMENT		DRAW	SWH	DATE 2006/08/29
SCALE		CHECKER		APPROVAL
UNIT	MM	SHEET	1	OF 1