



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.

REVISION INFORMATION


Rev.	Rev. Date	Modified By	Brief Description

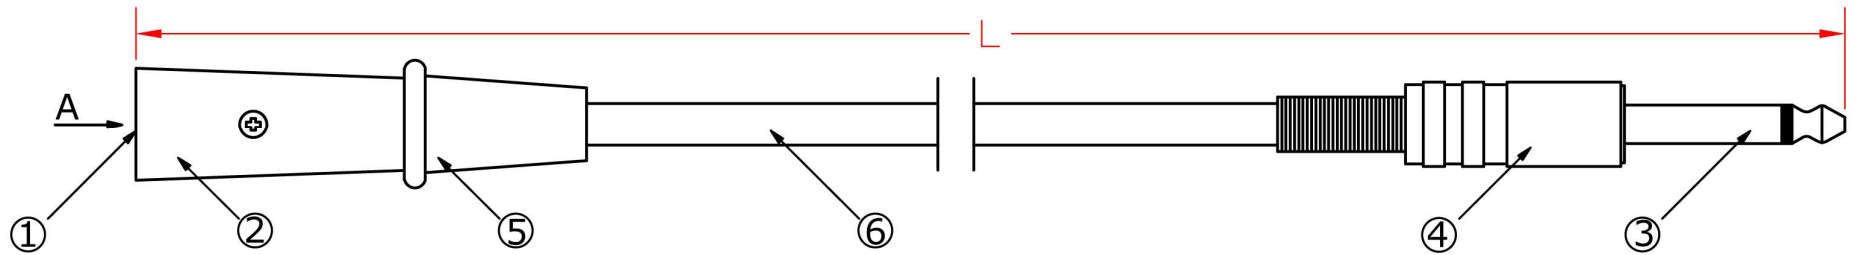

A Side View




CONNECTION

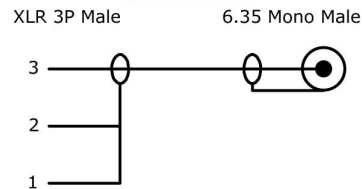


PART NO.	LENGTH(L)
2031-SF-11	6Ft 1830±50
2031-SF-12	10Ft 3050±80
2031-SF-13	15Ft 4570±80
2031-SF-14	25Ft 7620±80
2031-SF-15	50Ft 15240±100
2031-SF-17	100Ft 30480±150

ELECTRICAL TESTING

1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC



1-888-275-8755

DRAWN BY	DATE: 2013/06/01	DESCRIPTION: XLR 3P M 1/4" Mono Microphone Cable
CHECKED BY	SHEET 1 of 1	ITEM NO. 2031-SF-11
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm 

⑥	Cable	Cable (15/0.12) with 28/0.10 Sprial OD.: 6 Black PVC Jacket	1	PC
⑤	PVC	PVC Black	1	PC
④	Shell	Metal-Nickel Plated	1	PC
③	6.35 MONO Male	6.35 MONO Male-Nickel Plated	1	PC
②	Shell	Metal-Nickel Plated	1	PC
①	XLR 3P Male	XLR 3P Male	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	Q'TY	UNIT