
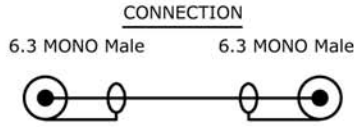


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.

| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

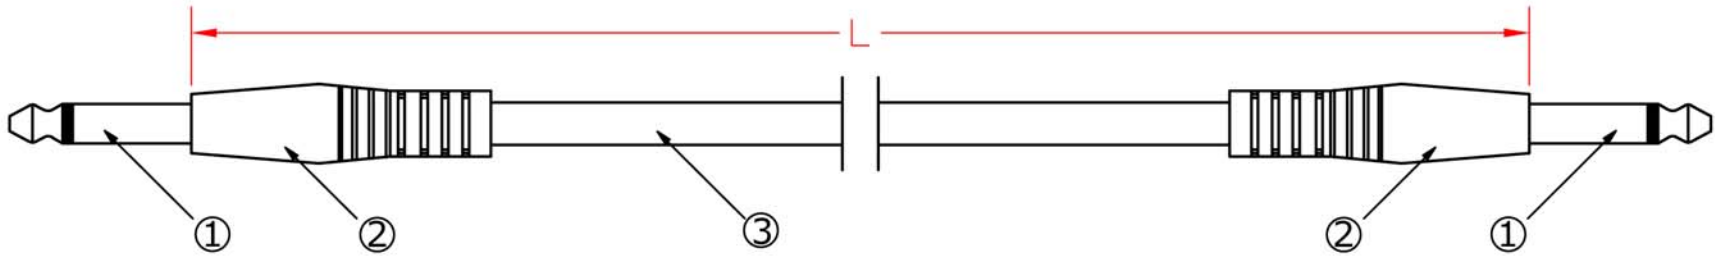

| PART NO. | LENGTH(L) |
|------------|-----------------|
| 2031-SF-21 | 6Ft 1830±50 |
| 2031-SF-22 | 10Ft 3050±80 |
| 2031-SF-23 | 15Ft 4570±80 |
| 2031-SF-24 | 25Ft 7620±80 |
| 2031-SF-25 | 50Ft 15240±100 |
| 2031-SF-27 | 100Ft 30480±150 |

ELECTRICAL TESTING
1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC



| | | |
|-------------|---------------------|---|
| DRAWN BY | DATE: 2013/06/01 | DESCRIPTION: 1/4" Mono Male/Male Cable |
| CHECKED BY | SHEET 1 of 1 | |
| APPROVED BY | SCALE 1:1 | REV. 00 UNIT: mm |

| | | | | |
|-----|-----------|--|------|------|
| ③ | Cable | Cable (10/0.10)+ 28/0.10 OD.: 5 Black PVC Jacket | 1 | PC |
| ② | PVC | PVC Black | 1 | PC |
| ① | MONO Male | 6.3 MONO Male-Nickel Plated | 1 | PC |
| NO. | PART NAME | SPECIFICATION DESCRIPTION | Q'TY | UNIT |