


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.


**RoHS  
Compliant**

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

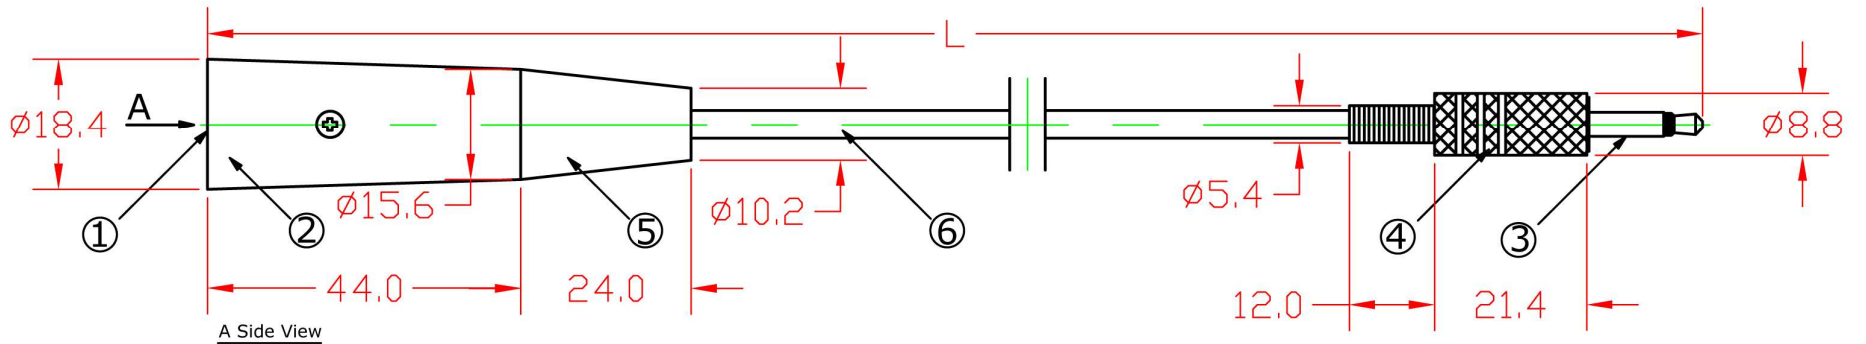


A Side View



CONNECTION


XLR 3P Male      3.5mm Mono Male



PART NO.	LENGTH(L)
2032-SF-89	6Ft 1830±50
2032-SF-90	10Ft 3050±80
2032-SF-91	25Ft 7620±80

ELECTRICAL TESTING

1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC



1-888-275-8755

DRAWN BY		DATE: 2014/04/12	DESCRIPTION: XLR 3P M to 3.5mm Mono M Cable	
CHECKED BY		SHEET 1 of 1	ITEM NO.    2032-SF-89	
APPROVED BY		SCALE 1:1	REV. 00	UNIT: mm

⑥	Cable	Cable (10/0.12) with 28/0.10 Sprial OD.: 4.0 Black PVC Jacket	1	PC
⑤	PVC	PVC Black	1	PC
④	Shell	Metal-Nickel Plated	1	PC
③	3.5mm MONO Male	3.5mm MONO Male-Nickel Plated	1	PC
②	Shell	Metal-Nickel Plated	1	PC
①	XLR 3P Male	XLR 3P Male	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	Q'TY	UNIT