


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description





UL c(UL) SPT-2 16/2C (1.31mm²) 60C VW-1
300V E313867 100030-765 FT1 XUANHUA

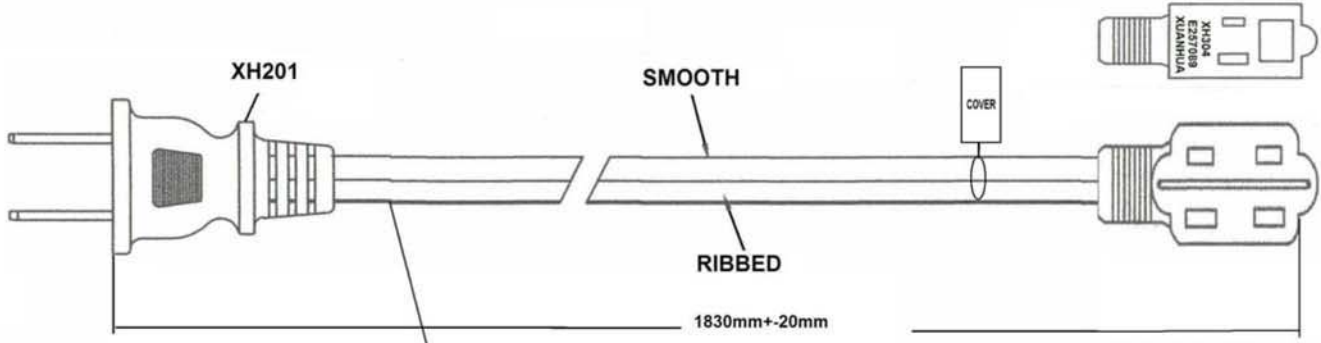

RIBBED SMOOTH

ELECTRIC TESTING:

1. 100% OPEN&SHORT TESTING
2. VOLTAGE RATING: AC>=1500V/S
3. PLUG(XH201)RATED POWER:
125V 10A UL-E257089
4. PLUG (XH304) RATED POWER:
125V 10A UL-E257089
5. WIRE: SPT-2 16/2 RATED POWER:
300V 10A UL-E313867
6. COLOR: WHITE

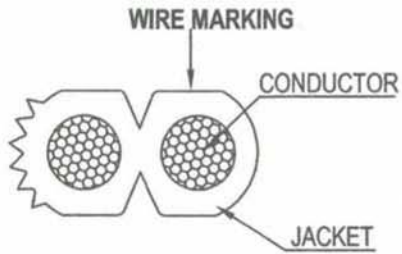

PACKING:
PE BAG:180*150mm
LABEL:
6ft 3-Outlet Power
Extension cord White
SPT-2 16/2

CONDUCTOR	INSULATION		JACKET		OVERALL DIA.
	AWG	Min Thick	Diameter	Min Thick	
16 (65°0.16)	/	/	1.01mm	1.14MM	3.8*7.4+-0.2

NOTE:If the conductors O.D is go beyond the scope,the resistance of conductor is standard then.

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

SFCABLE.COM

DRAWN BY WANG	DATE: 2015/01/14	DESCRIPTION: XH212-XH304 SPT-2 16/2 WHITE
CHECKED BY ZHANG	SHEET 1 of 1	
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm