

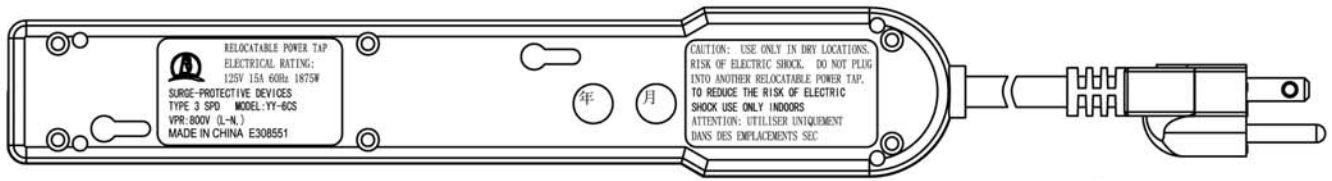


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

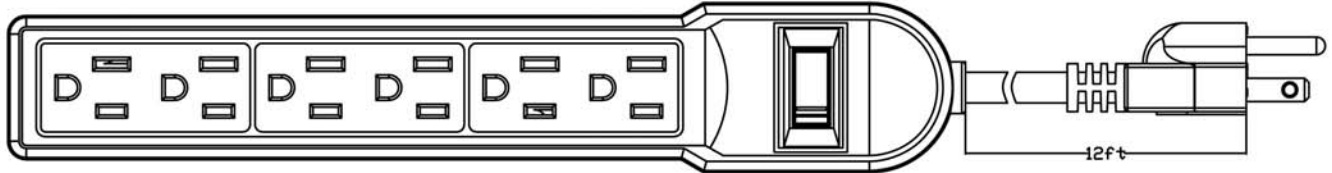

(1) SFT 300W 75°C 1P-1 332-09mm² (140G) EX38888 DATA 133796-001

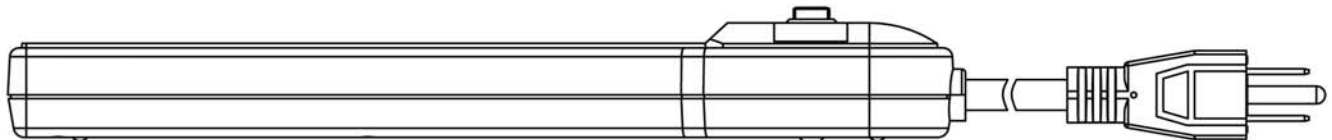


12ft

SFCABLE.COM			
DRAWN BY	DATE: 2012/09/08	DESCRIPTION: 12Ft 6 Outlet Surge Protector	
CHECKED BY	SHEET 1 of 1	ITEM NO. 2150-SF-10	
APPROVED BY	SCALE	REV. 00	UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

Product Specification

Item no	215010	Description:	6 Outlet Power Strip with Surge				
Photo(s)			Color		Indent Marking based on cULus or equivalent standard		
			Grey		(ETL)us ETL#____SJT 3X14AWG 60°C 300V VW-1 c(ETL) SJT 3X2.08mm2 (14AWG) FT2		
			Raw Material				
			Plastic: ABS 110g				
			Copper Strip: 11g				
Key Features & Specs			ON/OFF Swith: with Light		Compound Requirement		
Male Blades:UL CUL Recognized Components(NEMA-5-15P) Female Contacts:UL CUL Recognized Components(NEMA-5-15P) Female Ground:UL CUL Recognized Components(NEMA-5-15P) Label:UL CUL required Agency Approvals:ETL Listing Rate: AC 15A 125V 60Hz 1875W Maximum Surge: 7000Amp,6000V,90J			Cabel: 3C SJT 14AWG 2.5FT		PVC 60°C Insulation Compound Approved for SJT Cable		
			Jacket Construction		Cold Bend Test Requirement		
			100% Fully Pressure Extruded Jacket		Must pass cold bend test at -20°C		
Test							
Hipot test @1.5KV Power test @ with light can light Drop test @70cm Grounded test@ with ground equirement							
ETL file #	UL file #	CSA/UL file #					
	E308551				Date:	2011.11.15	