

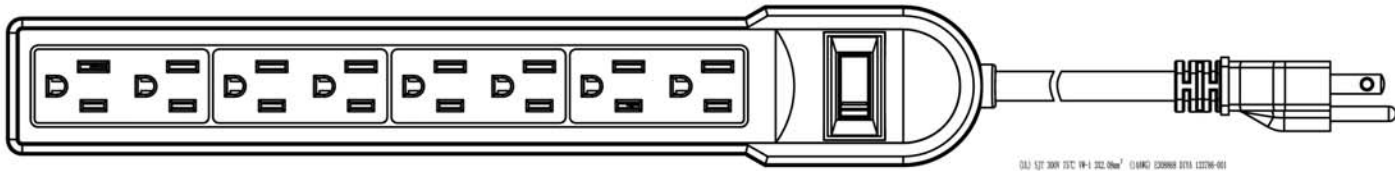
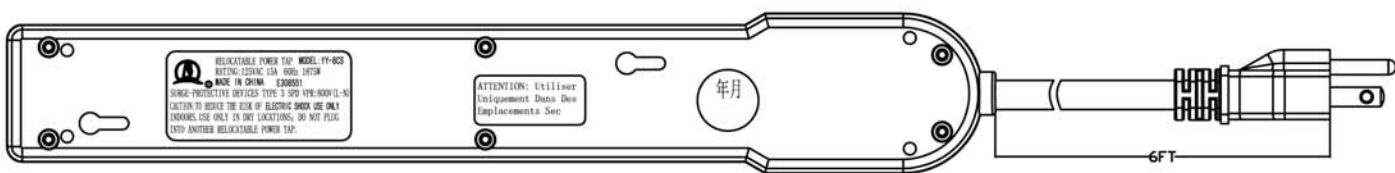



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

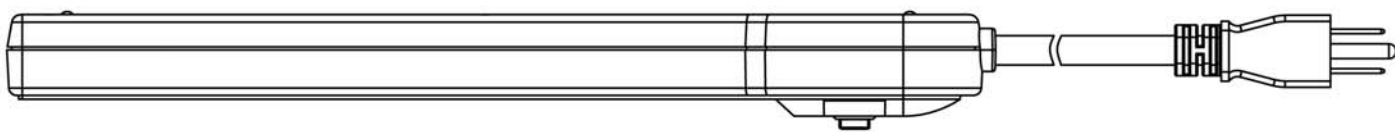

100 1/2" 200V 15°C 1P+1 202.0mm<sup>2</sup> 1500W 220000 0114 12276-001



RELIABLE POWER SUP MODEL PP-602  
 RATING: 120VAC USA 60Hz 1875W  
 MADE IN CHINA - 1200501  
 SURGE PROTECTIVE DEVICES TYPE 3 SPD 149V-800V (1-5)  
 CAUTION TO REDUCE THE RISK OF ELECTRIC SHOCK USE ONLY  
 PROXIMS USE ONLY IN DRY LOCATIONS; DO NOT PLUG  
 INTO ANOTHER RELIABLE POWER SUP.

ATTENTION: Utiliser  
 Equipement Dans Des  
 Emplacements Sec

年月

6FT


NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				



1-888-275-8755

DRAWN BY	DATE: 2012/09/08	DESCRIPTION: 6Ft 8 Outlet Surge Protector
CHECKED BY	SHEET 1 of 1	ITEM NO. 2150-SF-60
APPROVED BY	SCALE	REV. 00 UNIT: mm

# Product Specification

<b>Item no</b>	2150-SF-60	<b>Description:</b>	8 Outlet Power Strip with Surge
<b>Photo(s)</b>		<b>Color</b>	<b>Indent Marking based on cULus or equivalent standard</b>  (ETL)us ETL# ____ SJT 3X14AWG 60°C 300V VW-1 c(ETL) SJT 3X2.08mm2 (14AWG) FT2
		Grey	
		<b>Raw Material</b>	
		Plastic: ABS 134g	
		Copper Strip: 14.6g	
<b>Key Features &amp; Specs</b>		<b>ON/OFF Swith: with Light</b>	<b>Compound Requirement</b>
Male Blades:UL CUL Recognized Components(NEMA-5-15P) Female Contacts:UL CUL Recognized Components(NEMA-5-15P) Female Ground:UL CUL Recognized Components(NEMA-5-15P) Label:UL CUL required Agency Approvals:ETL Listing Rate: AC 15A 125V 60Hz 1875W Maximum Surge: 7000Amp,6000V,90J		Cabel: 3C SJT 14AWG 2.5FT	PVC 60°C Insulation Compound Approved for SJT Cable
		<b>Jacket Construction</b>	<b>Cold Bend Test Requirement</b>
		100% Fully Pressure Extruded Jacket	Must pass cold bend test at -20°C
<b>Test</b>			
Hipot test @1.5KV Power test @ with light can light Drop test @70cm Grounded test@ with ground equirement			
<b>ETL file #</b>	<b>UL file #</b>	<b>CSA/UL file #</b>	
	E308551		<b>Date:</b> 2011.11.15