



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

FEMALE

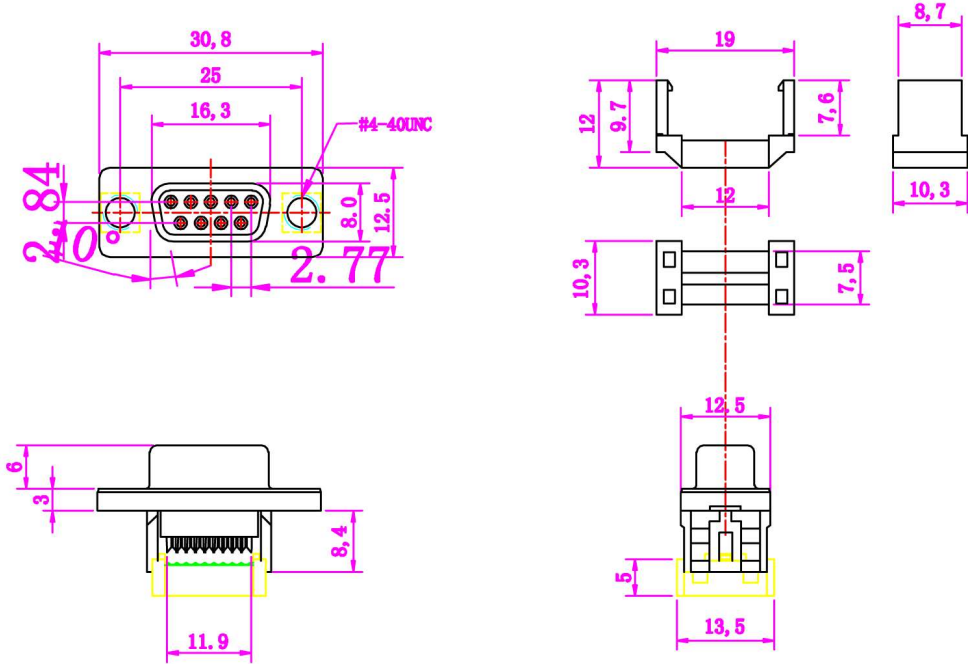

MALE

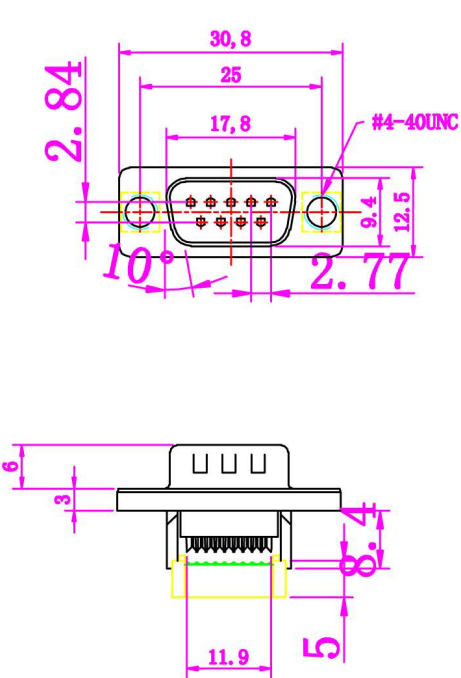

Specifications:

Contact Resistance: 30mΩ max. at DC 100mA
Insulator Resistance: 1000mΩ min. at DC 500V
Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature: -55° C +105° C
Contact: Male Brass or Female Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-0)

 1-888-275-8755			
DRAWN BY	DATE: 2012/1/4	DESCRIPTION: DIDC-9MF-A/Y外扣	
CHECKED BY	SHEET 1 of 1	ITEM NO. 2733-SF-05	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm