
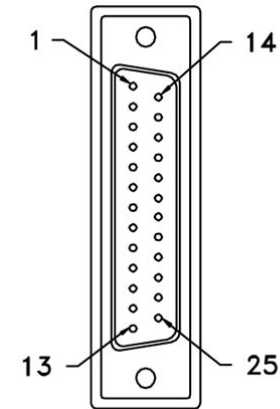
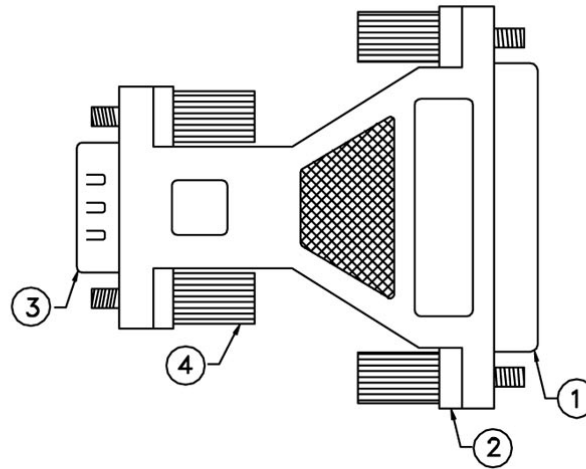


REVISION		DATE	APPROVED
LTR	DESCRIPTION		
A	NEW RELEASE	07/13/99	H.T.




Pin Assignment

DB9 Male	DB25 Female
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS ARE IN INCHES
 2. TOLERANCES:
 DECIMALS X.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR
 SUBJECT MATTER CONTAINED HEREIN,
 SHALL NOT BE USED, COPIED OR
 DISSEMINATED IN ANY MANNER, OR FOR
 ANY PURPOSE, OTHER THAN AS
 EXPRESSLY STATED BY

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	07/13/99
CHECKED	
CUSTOMER APPROVAL	

 1-888-275-8755			
AT Modem Adaptor (DB9M/DB25F, 9C, Molded, Color Beige)			
SIZE	DWG NO.	PART NO.	REV.
	30D1-B2	30D1-B2	A
SCALE: NONE	RELEASE DATE: 07/13/99	SHEET: 1 OF 1	

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
4.	4/40 Molded Thumbscrew, Color Beige	2	PCS.
3.	D-Sub 9 Pin Male w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 25 Pin Female W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST