


P: M-Y449A
M-449A
P3: M-427A

Customer No:

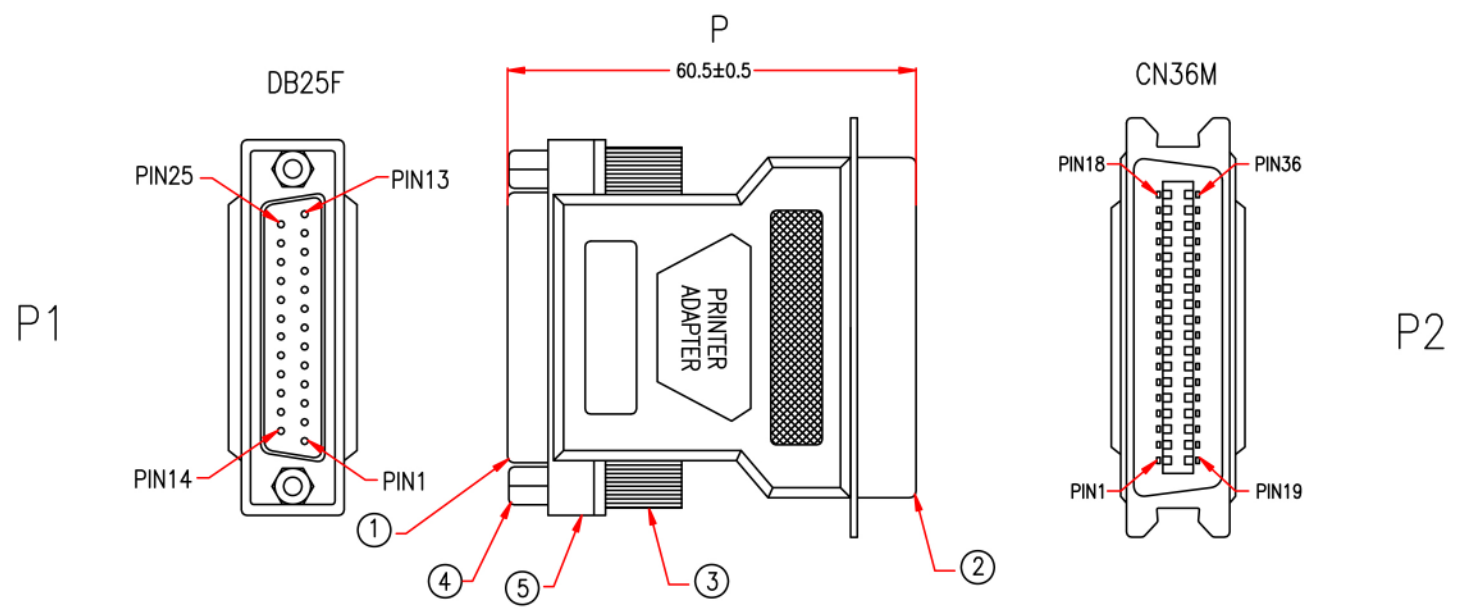

4227

P1	P2	P1	P2
1	1	14	14
2	2	15	32
3	3	16	31
4	4	17	36
5	5	18	33
6	6	19	19
7	7	20	21
8	8	21	23
9	9	22	25
10	10	23	27
11	11	24	29
12	12	25	30
13	13	SHIELD	SHIELD

⚠ NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5	Jumper Wire UL1061/26#/1C, OD1.0mm, COLOR BLACK*25PCS, LENGHT 55mm, WHITE*1PC, LENGHT 60mm, DRAWING NO. EH002601C-013	H5SE06-0304	26 M304
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777	M7777
	MOLDED PVC BEIGE	H1BF01-0304B01	M304
4	HEX-NUT #4-40, 5.0*6.6mm	A6BC02-0095	2 M95
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm, BEIGE	A6AA09-0095	2 M95
2	CN36 FEMALE WITH LATCH, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1DD05-0108U09	1 M108
1	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE01-0277U09	1 M277

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		
DATE	05/JUL/19	ITEM NO.	30D3-C4
		UNIT:mm	