


P1:	M-Y131B	Customer No:	
	M-131B		
P2:	M-Y113A		
	M-113A		

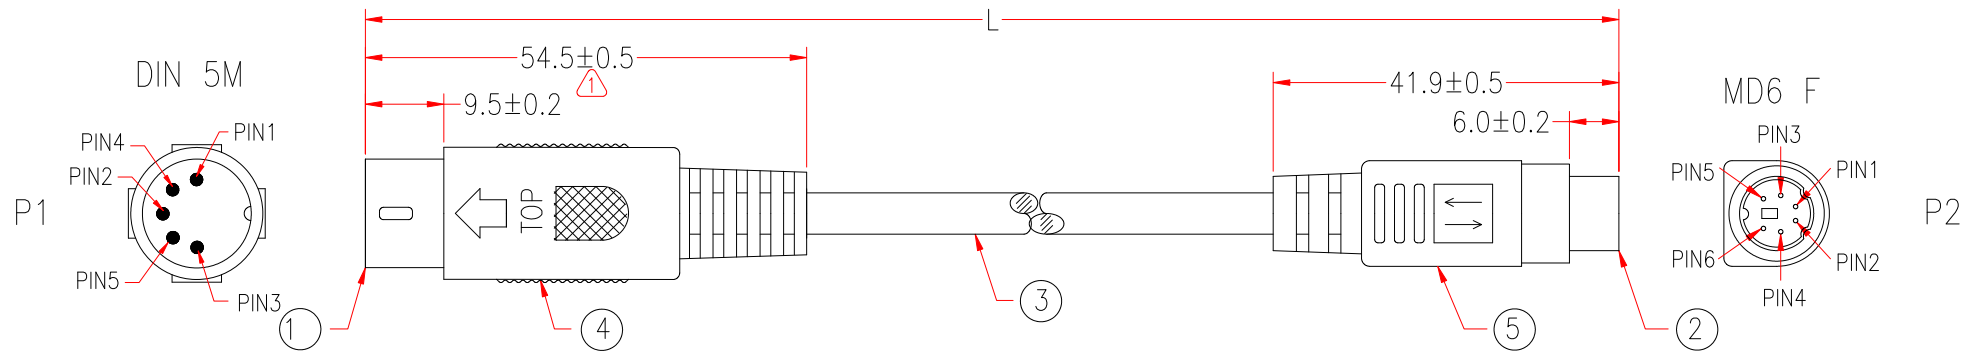

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE $\varnothing 1.0 \times 8\text{mm}$	A4HA23-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	BLACK HEAT SHRINK TUBE $\varnothing 1.0 \times 10\text{mm}$	A4HA23-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	NON-UL 4C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 4.0mm, JACKET BEIGE, DRAWING No. EMAL2804C-020	H5BL13-0304B01	L-15mm	M304
2	MINI DIN 6 FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1EE03-0108	1	M108
1	DIN5 MALE, NICKEL PLATED ON CONTACTS, BLACK INSULATOR	A1FC04-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

1022	
P1	P2
1	5 BROWN
2	1 RED
4	3 ORANGE
5	4 BLACK
SHIELD	SHIELD

營業一部
2016.01.12
郭嘉芬

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\uparrow$ $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	JWJ		
DATE	12/JAN/16	ITEM NO.	30D5-2B
		UNIT:mm	