


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

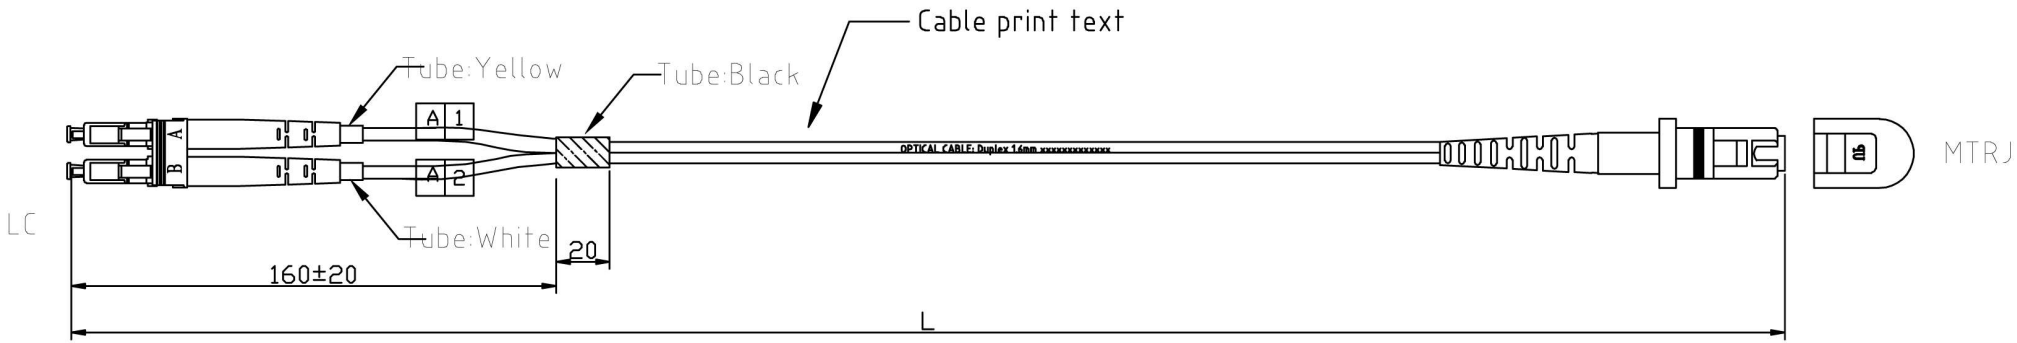

$L \leq 5m$ , TOLERANCES:  $0 \leq \Delta L \leq 5cm$   
 $L > 5m$ , TOLERANCES:  $0 \leq \Delta L \leq \%1 * L$

Specifications:

Fiber Mode	PC	APC	OM3	MM	Item
Type	LC-MTRJ-DX				102813
Cable Diameter(mm)	φ1.6				
LC Boot Color	beige	beige	beige	beige	
MTRJ Boot Color	black	black	black	black	
Cable Color	yellow	yellow	aqua	Orange	
Core Diameter(um)	9/125		50/125	62.5/125	
Cable Type	G657A		OM3	OM1/OM2	
MTRJ Insertion Loss(dB)	≤ 0.75		≤ 0.50		
LC Insertion Loss(dB)	≤ 0.3				
MTRJ Return Loss(dB)	≥ 40		≥ 30		
LC Return Loss(dB)	≥ 50	≥ 60	≥ 35	≥ 35	
Operating Temperature(°C)	-40~+75				
Storage Temperature(°C)	-40~+85				
Operating Wavelength(nm)	1310/1550		850/1300		



IN Packing

<b>DRAWN BY:</b> xlong	<b>DATE:</b> 2012/07/06	<b>DESCRIPTION:</b> LC-MTRJ-DX Patchcord	
<b>CHECKED BY:</b>	<b>SHEET</b> 1 of 1	<b>ITEM NO.:</b>	
<b>APPROVED BY:</b>	<b>SCALE</b> 1:1	<b>REV.</b> 00	<b>UNIT:</b> mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				