


**NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD**


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

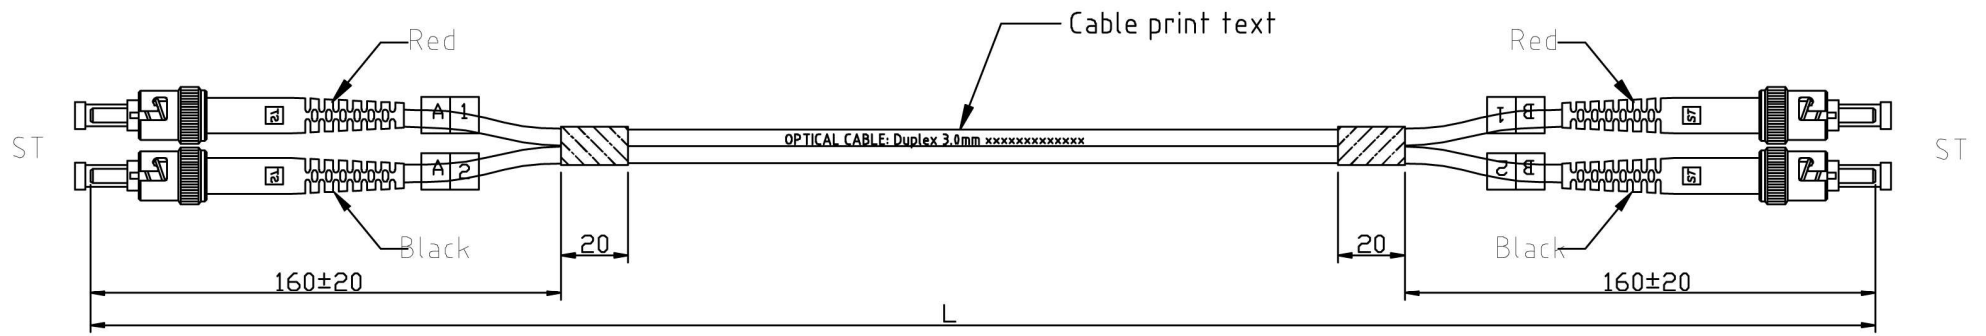

$L \leq 5m, TOLERANCES: 0 \leq \Delta L \leq 5cm$   
 $L > 5m, TOLERANCES: 0 \leq \Delta L \leq \%1 * L$

Specifications:

Fiber Mode	PC	APC	OM3	MM	Item
Type	ST-ST-DX				102709
Cable Diameter(mm)	Ø3.0				102710
SC Boot Color	red/black	red/black	red/black	red/black	102758
Cable Color	yellow	yellow	aqua	Orange	102784
Core Diameter(um)	9/125		50/125	62.5/125	102785
Cable Type	G657A		OM3	OM1/OM2	102931
Insertion Loss(dB)	≤ 0.3				102935
Return Loss(dB)	≥ 50	≥ 60	≥ 35	≥ 35	
Operating Temperature(°C)	-40~+75				
Storage Temperature(°C)	-40~+85				
Operating Wavelength(nm)	1310/1550		850/1300		



IN Packing

<b>DRAWN BY</b> :xlong	<b>DATE</b> : 2012/02/07	<b>DESCRIPTION</b> : ST-ST-DX Patchcord
<b>CHECKED BY</b>	<b>SHEET</b> 1 of 1	<b>ITEM NO.</b>
<b>APPROVED BY</b>	<b>SCALE</b> 1:1	<b>REV.</b> 00
		<b>UNIT</b> : mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				