


P:

M-Y469A

M-469A

Customer No.:

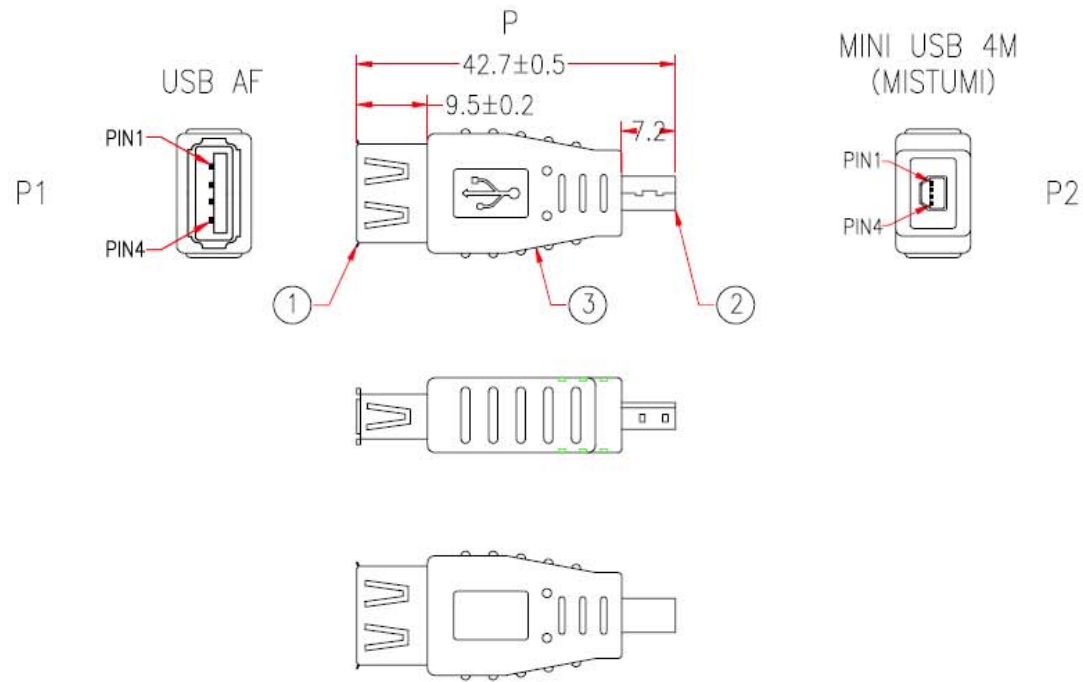

PIN ASSIGNMENT

P1

P2

1 _____ 1
 2 _____ 2
 3 _____ 3
 4 _____ 4

SHIELD _____ SHIELD

⚠ NOTE: All relevant materials are complied with RoHS directive .

3	UL1007 30AWG INSULATION WIRE, LENGTH 28mm, DRAWING No.EH003001C-023	5	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*8mm	4	M743
	COPPER FOIL 25*40mm	1	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
2	MINI USB 4P MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR, MISTUMI TYPE	1	M108
1	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATION	1	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		 1-888-275-8755	
CHECKED	TIAN		
DRAWING	XIE		
DATE	28/NOV/07	ITEM NO.	30U1-04300
		UNIT:mm	