

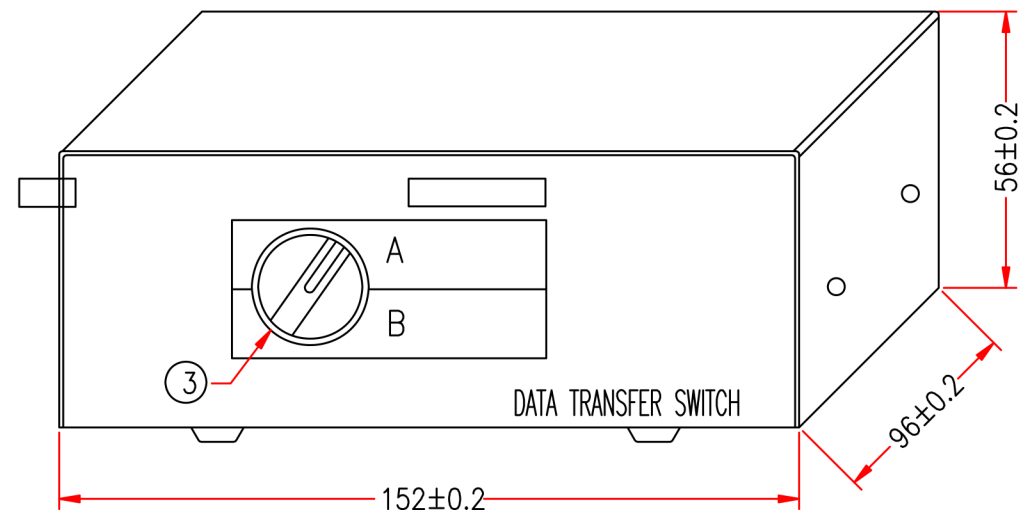
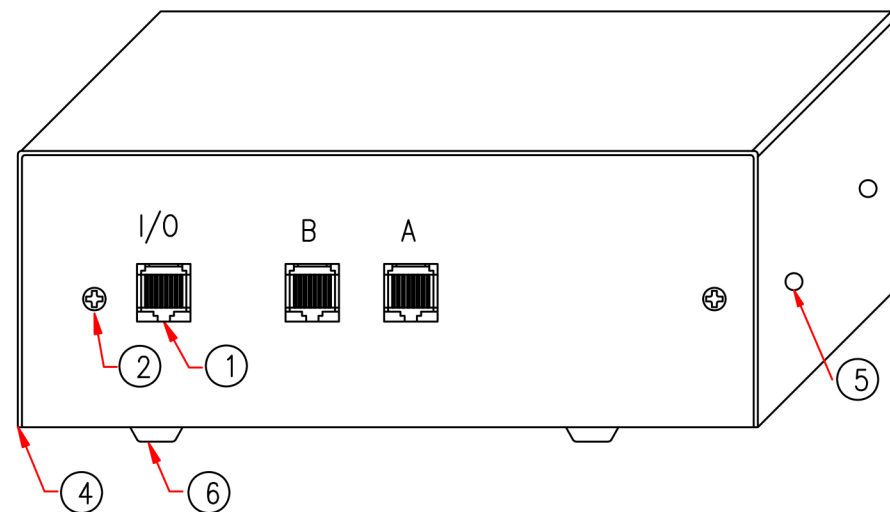


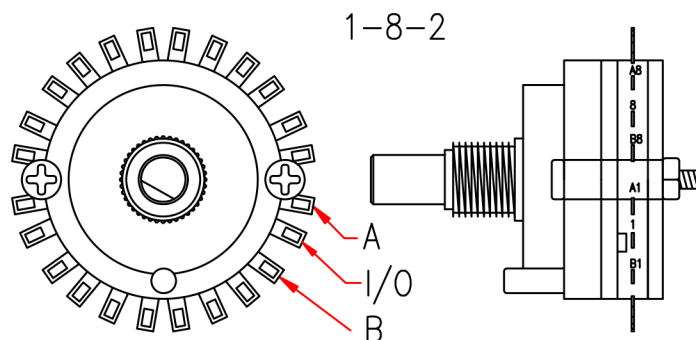

RJ45 F



\*NOTE: ALL relevant materials are complied with RoHS directive

|   |                                                                        |                            |      |       |
|---|------------------------------------------------------------------------|----------------------------|------|-------|
| 6 | PLASTO-VISCO-ELASTIC BODY                                              | A4JA01-0562                | 4    | M562  |
| 5 | SCREW 3*6PWB                                                           | A6AE05-0805                | 4    | M805  |
| 4 | METAL CASE, THICKNESS 0.8mm                                            | A6GA50-0315                | 1set | M315  |
| 3 | Jumper Wire UL1061/28#/1C x 150mm ID1.0 WHITE DRAWING NO.EH002601C-013 | H5SE06-0304W01             | 24   | M304  |
|   | MAIN HEART 1-8-2                                                       | A7BA03-1087                | 1set | M1087 |
|   | KNOB FOR A, B, SWITCH                                                  | A4KA01-0267                | 1    | M267  |
| 2 | STATOR                                                                 | A6GD02-0901                | 1    | M901  |
|   | PCB: RJ-45                                                             | A7AB21-0730                | 1    | M730  |
|   | HEX-NUT 5.5*8mm, SCREW CAP 2.4*5.5mm                                   | A6AC02-0805<br>A6BA01-0805 | 2set | M805  |
| 1 | RJ45 FEMALE, GOLD FLASH ON CONTACTS                                    | A1NE12-0806                | 3    | M806  |

| No. | DESCRIPTION | Q'TY | Supplier |
|-----|-------------|------|----------|
|-----|-------------|------|----------|

|          |     |  |                                                                                                                                                     |
|----------|-----|--|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| APPROVED |     |  | Cable Length<br>Unless Other Spec.<br>Tolerances:<br>0 ~200mm ±10mm<br>201~1000mm ±20mm<br>1001 ~1500mm ±25mm<br>1501~2100mm ±30mm<br>2100mm↑ ±40mm |
| CHECKED  | HU  |  |                                                                                                                                                     |
| DRAWING  | ZHU |  |                                                                                                                                                     |

|      |           |          |         |         |  |
|------|-----------|----------|---------|---------|--|
| DATE | 07/DEC/18 | ITEM NO. | 40R2-A2 | UNIT:mm |  |
|------|-----------|----------|---------|---------|--|

| 6070   |        | RJ45 F |     |
|--------|--------|--------|-----|
| RJ45 F | SWITCH | (I/O)  | A&B |
| 1      | 1      | 1      | 1   |
| 2      | 2      | 2      | 2   |
| 3      | 3      | 3      | 3   |
| 4      | 4      | 4      | 4   |
| 5      | 5      | 5      | 5   |
| 6      | 6      | 6      | 6   |
| 7      | 7      | 7      | 7   |
| 8      | 8      | 8      | 8   |