
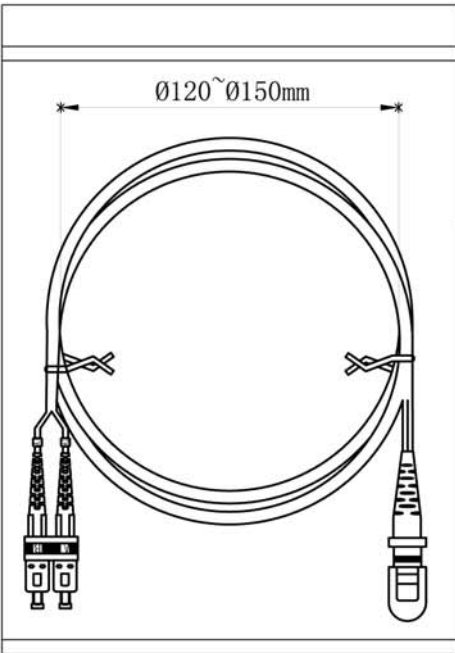


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

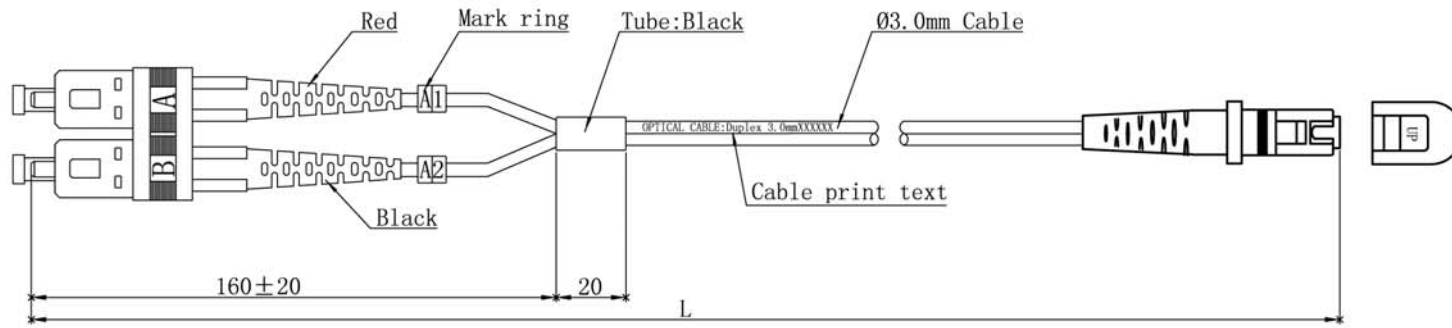

Specifications:

Type	DSC/PC-MTRJ/PC
Fiber Mode	OM1
Core Diameter(um)	62.5/125
Operating Wavelength(nm)	850/1300
Cable Color	Orange
Cable Diameter(mm)	Ø3.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
SC Connector Color(Boot)	Red/Black
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm  
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%\*L

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:  
 .x +1  
 .x +0.2  
 .xx +0.05

**sfcable.com**

DRAWN BY	DATE: 2015/06/01	DESCRIPTION: SC-MTRJ-DX OM1 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
	UNIT:mm	