


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

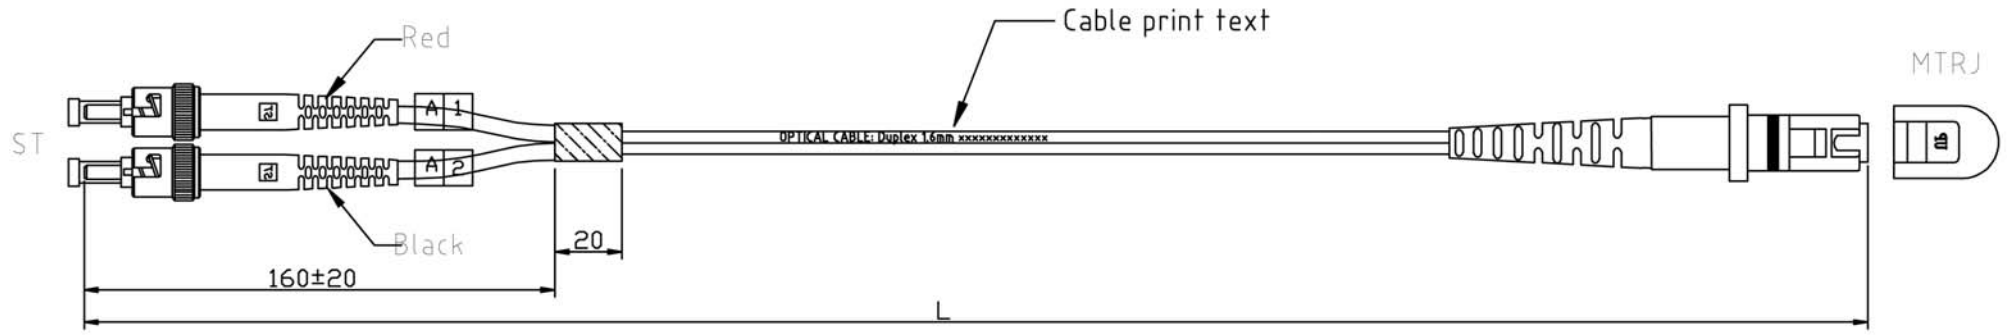

$L \leq 5m, TOLERANCES: 0 \leq \Delta L \leq 5cm$
 $L > 5m, TOLERANCES: 0 \leq \Delta L \leq \%1 * L$

Specifications:

Fiber Mode	PC	APC	OM3	MM	Item
Type	ST-MTRJ-DX				102873
Cable Diameter(mm)	φ1.6				102874
LC Boot Color	red/black	red/black	red/black	red/black	102875
MTRJ Boot Color	black	black	black	black	
Cable Color	yellow	yellow	aqua	Orange	
Core Diameter(um)	9/125		50/125	62.5/125	
Cable Type	G657A		OM3	OM1/OM2	
MTRJ Insertion Loss(dB)	≤ 0.75		≤ 0.50		
LC Insertion Loss(dB)	≤ 0.3				
MTRJ Return Loss(dB)	≥ 40		≥ 30		
LC Return Loss(dB)	≥ 50	≥ 60	≥ 35	≥ 35	
Operating Temperature(°C)	-40~+75				
Storage Temperature(°C)	-40~+85				
Operating Wavelength(nm)	1310/1550		850/1300		



IN Packing

DRAWN BY: xlong	DATE: 2012/02/07	DESCRIPTION: ST-MTRJ-DX Patchcord
CHECKED BY:	SHEET 1 of 1	ITEM NO.:
APPROVED BY:	SCALE 1:1	REV. 00
	UNIT: mm	

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				