


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	New Release	11/16/08	H.T.

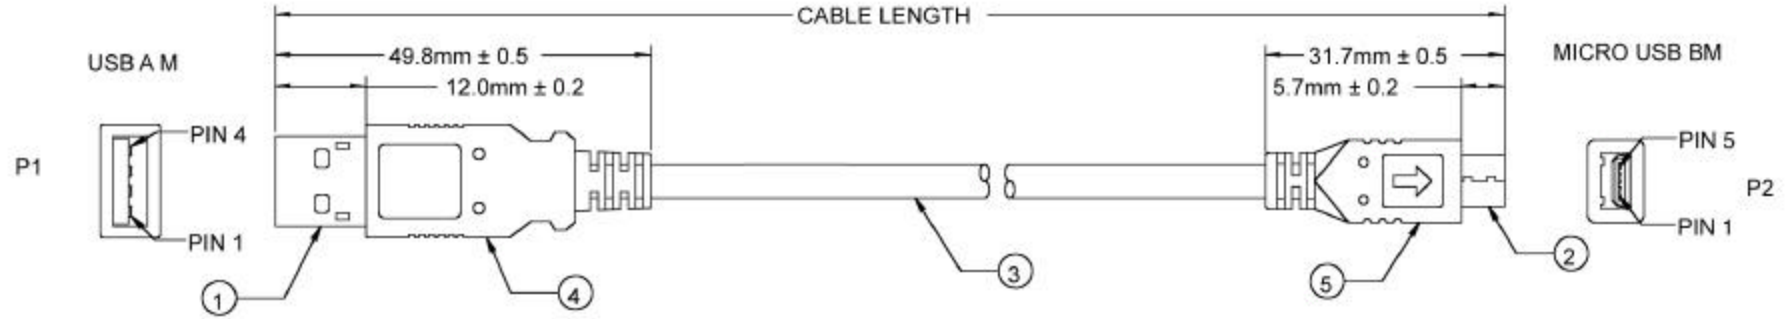

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH RoHS DIRECTIVE

PIN ASSIGNMENT			
P1		P2	
1	—————	1	RED 26#
2	⌘	2	WHITE
3	⌘	3	GREEN
4	—————	5	BLACK 26#
SHIELD	—————	SHIELD	

5.	TRANSPARENT PE MOLDED		
	BLACK PVC MOLDED		
4.	BLACK PVC MOLDED		
3.	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG. AND 2C 26AWG., O.D. 4.5mm, BLACK OUTER JACKET	xx	FT.
2.	MICRO USB B MALE 2.0, GOLD PLATING 30u CONTACTS	1	PCS.
1.	USB A MALE 2.0, GOLD PLATING 30u CONTACTS	1	PCS.
ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT

CABLE ASSEMBLY PARTS LIST			
Cable Length Tolerances (Unless other spec.) 0 ~ 0.2m → ± 0.01m 0.21m ~ 1.0m → ± 0.02m 1.1m ~ 1.5m → ± 0.025m 1.51m ~ 2.1m → ± 0.03m 2.1m and up → ± 0.04m	CUSTOMER	<p style="text-align: center;"><b>SFCable.com</b> 1-888-275-8755</p>	
	CUSTOMER APPROVAL		
<small>PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY SPECIFIED BY</small>	DRAWN DATE Howie Tseng 11/16/08	TITLE <b>USB A MALE / MICRO USB B MALE CABLE</b>	
	CHECKED	SIZE FSCM NO. USB2MC-XXMM DWG NO. USB2MC-XXMM REV. A	
SCALE: NONE		RELEASE DATE: 11/16/08	SHEET 1 OF 1