


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
1	2016.12.01	WJH	1.Printing without oil 2.Change SSTP to FTP

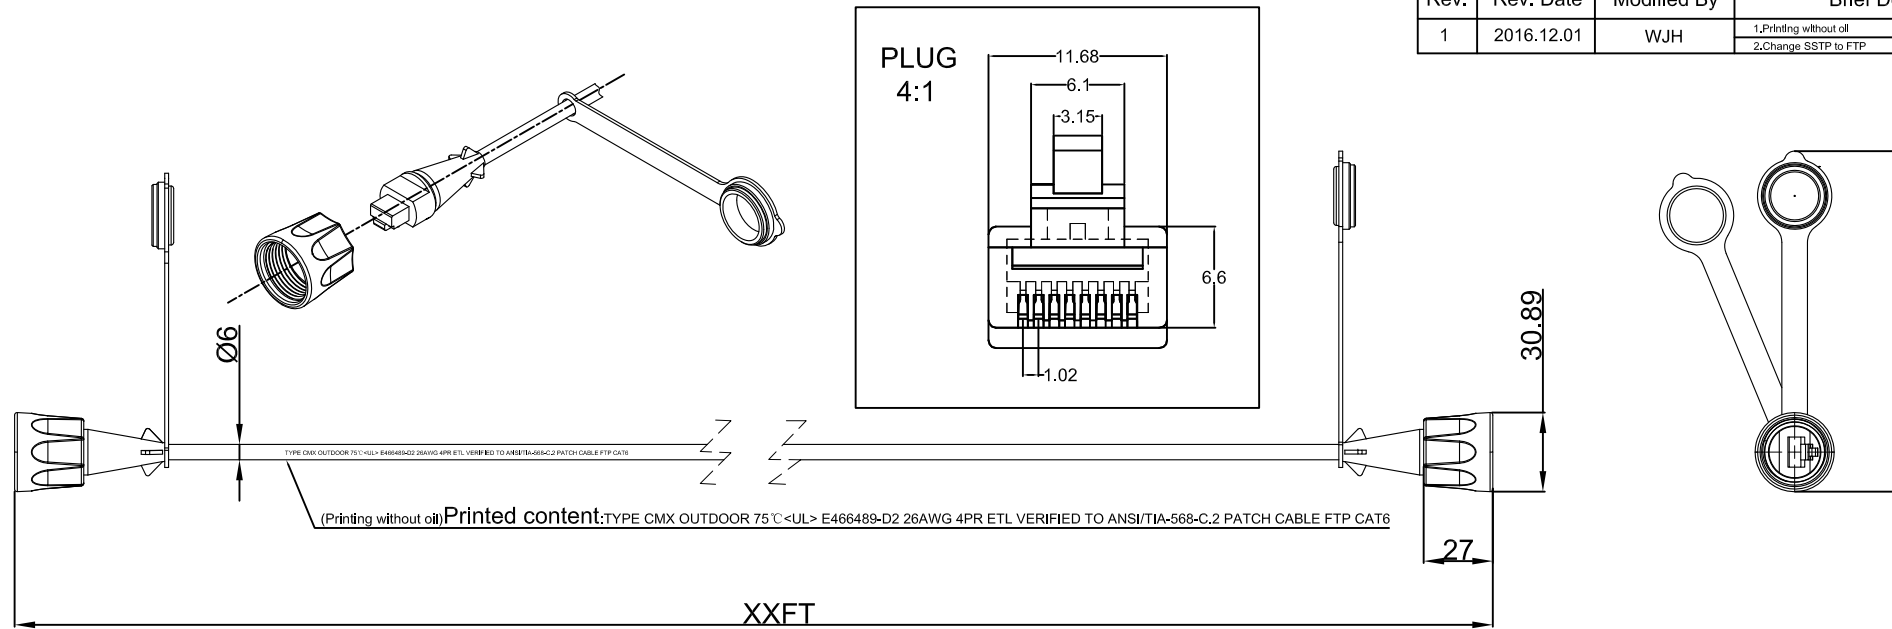


SPECIFICATION:

1. The material of cords is a kind of multicore cords and they meet the requirements stipulated in TIA/EIA-568-B about sixth category of patch cords.
2. Support 250 MHz broadband
3. Dielectric withstanding voltage: 1000V
4. Contact resistance: 2.5mΩ Max
5. Insulation resistance: 1000MΩ Min
6. Insertion life: 750 cycles Min
7. Waterproof cable, anti-UV, Oil free
8. Operating Temperature Range: -30°C to 75°C

MATERIAL:

1. The housing of patch cords: PBT
2. Dustproof cap: PVC
3. PIN: PHOSPHOR BRONZE C5191

Cross - Section View :

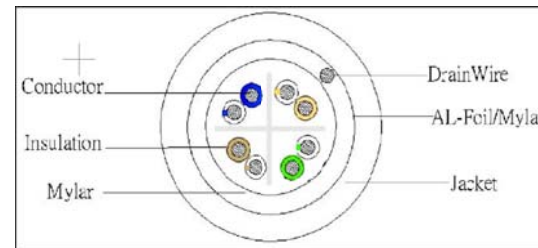

Cat 6

56Y4
E145249



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
④	Washer	Waterproof、Ø1.8MM	2	PCS
③	Dust cover	PVC、Waterproof	2	PCS
②	Connector Nut	PBT、Waterproof	2	PCS
①	Crystal Head	Sealed plastic structure, Trigeminal sheet Six on two under	2	PCS

DRAWN BY	WLL	DATE:	2016/12/19
		DESCRIPTION:	Cat.6 FTP Industrial patch cord w/dust cap XXXFt
CHECKED BY		SHEET	1 of 1
APPROVED BY		ITEM NO.	CAT6-STP-CAP-XX
		SCALE	REV. 01
		UNIT:	mm