



DATE	REV	DESCRIPTION	BY	CHKD

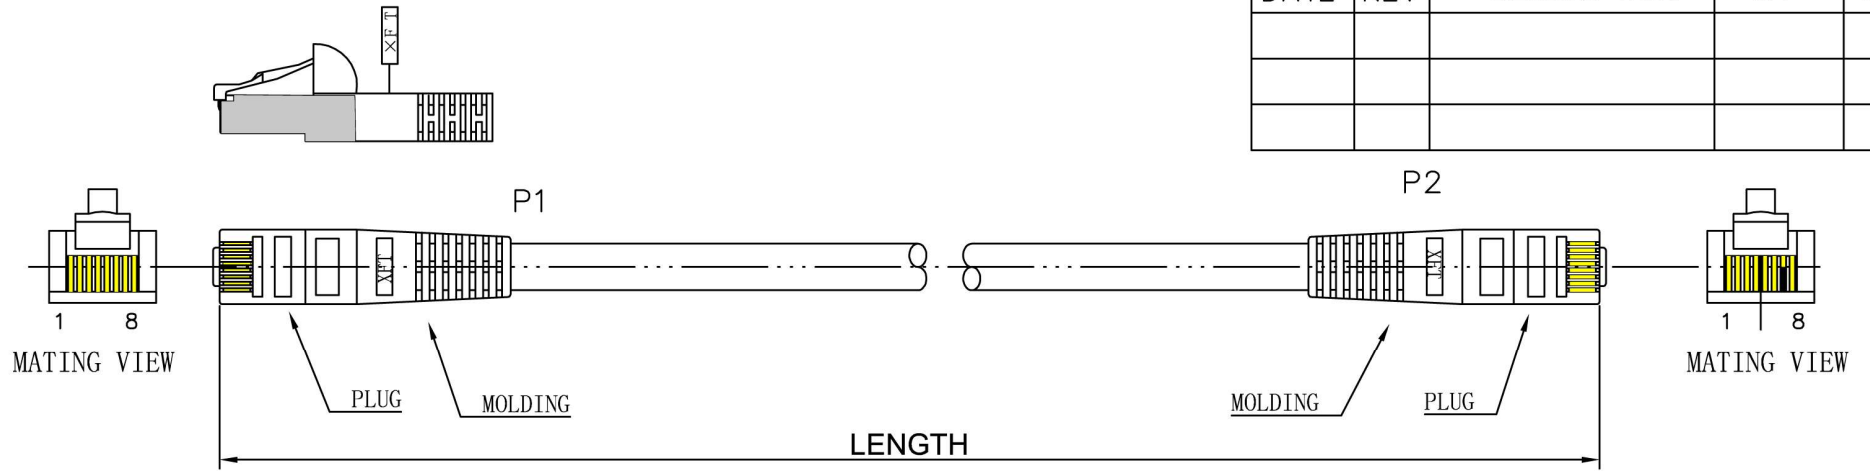


Marking: YFC CAT.6 26AWG×4P SSTP IEC 60332.1 PATCH CABLE-CONFORM  
 TO ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 3P/ETL VERIFIED  
 CM(UL) C(UL) CMH E164469-F3

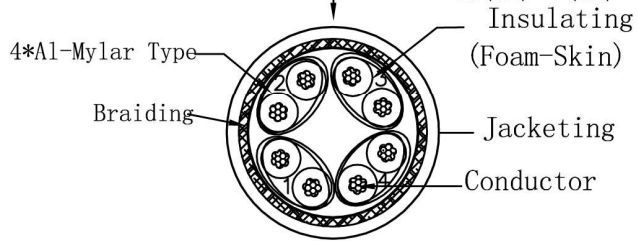

<b>Conductor</b>	Bare Copper 26AWG 7/0.16±0.015mm
<b>Insulation</b>	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.05mm
<b>Jacketing</b>	Thickness:MIN at any point:0.46mm MAX AVG:0.58mm Diameter:6.1±0.2mm

<b>WIRE</b>	CAT.6 SSTP STR 26AWG
<b>PLUG</b>	YUS-04
<b>Length</b>	××M
<b>WIRE COLOR</b>	×

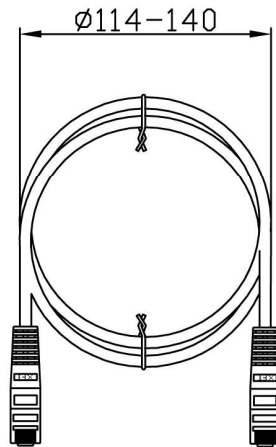

PA/R	PINOUT		
	P1 (T568A)	WIRE	P2 (T568B)
1	3	WHT/ORG	1
	6	ORG	2
2	1	WHT/GRN	3
	2	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Unless specified on the drawing, tolerances are per the follows:  
 . ± 1  
 .X ± 0.2  
 .XX ± 0.05



<b>DRAW.NO</b>	YUS-04	<b>ITEM</b>	CAT.6 SSTP STR 26AWG		
<b>DEPARTMENT</b>		<b>DRAW</b>	尚文华	<b>DATE</b>	2006/08/29
<b>SCALE</b>		<b>CHECKER</b>		<b>APPROVAL</b>	
<b>UNIT</b>	MM	<b>SHEET</b>	1	OF	1

