



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description
02	2022.3.30	FW	Add label info

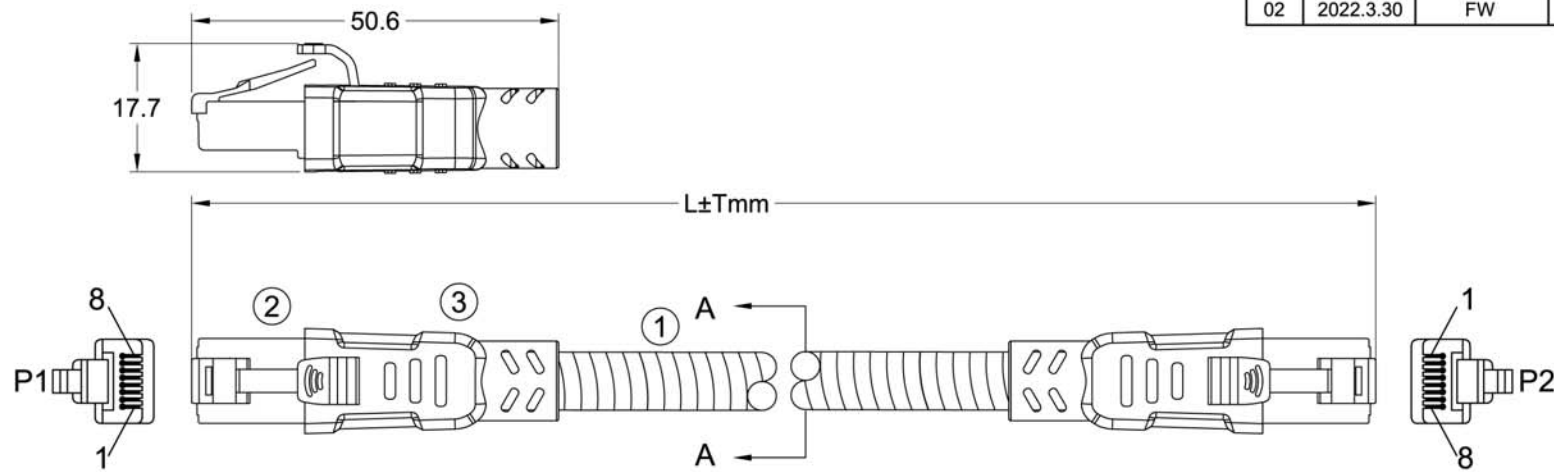

JACKET:SUS304+PVC Thickness:0.60±0.1mm  
 OD=7.8±0.2mm  
 INSULATION:HDPE Thickness: 0.18±0.05mm  
 OD=0.95±0.05mm  
 CONDUCTOR:[24AWG(7/0.20±0.008mmBC)]\*4P

SEC:A-A

orange 1	green 2
white/orange	white/orange
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(ft)	T(inch)	T(%)
3	±1.2	3.33%
5	±1.2	2%
7	±2	2.38%
10	±2	1.67%
25	±4	1.33%
50	±6	1%
65	±6	0.9%



1-888-275-8755

DRAWN BY FW	DATE: 2022/03/30	DESCRIPTION: CAT.6A Patch Cable Armored Anti-Rodent 24AWG
CHECKED BY ACE	SHEET 1 of 2	ITEM NO. CAT6A-AMR-24AWG
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE PLUG.		
②	MOLDED	PVC MOLDED BOOT .		
①	CABLE	CAT.6A UTP PVC+SUS304 24AWG*4P BC		