


REVISION			
LTB	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/12/95	M.T.

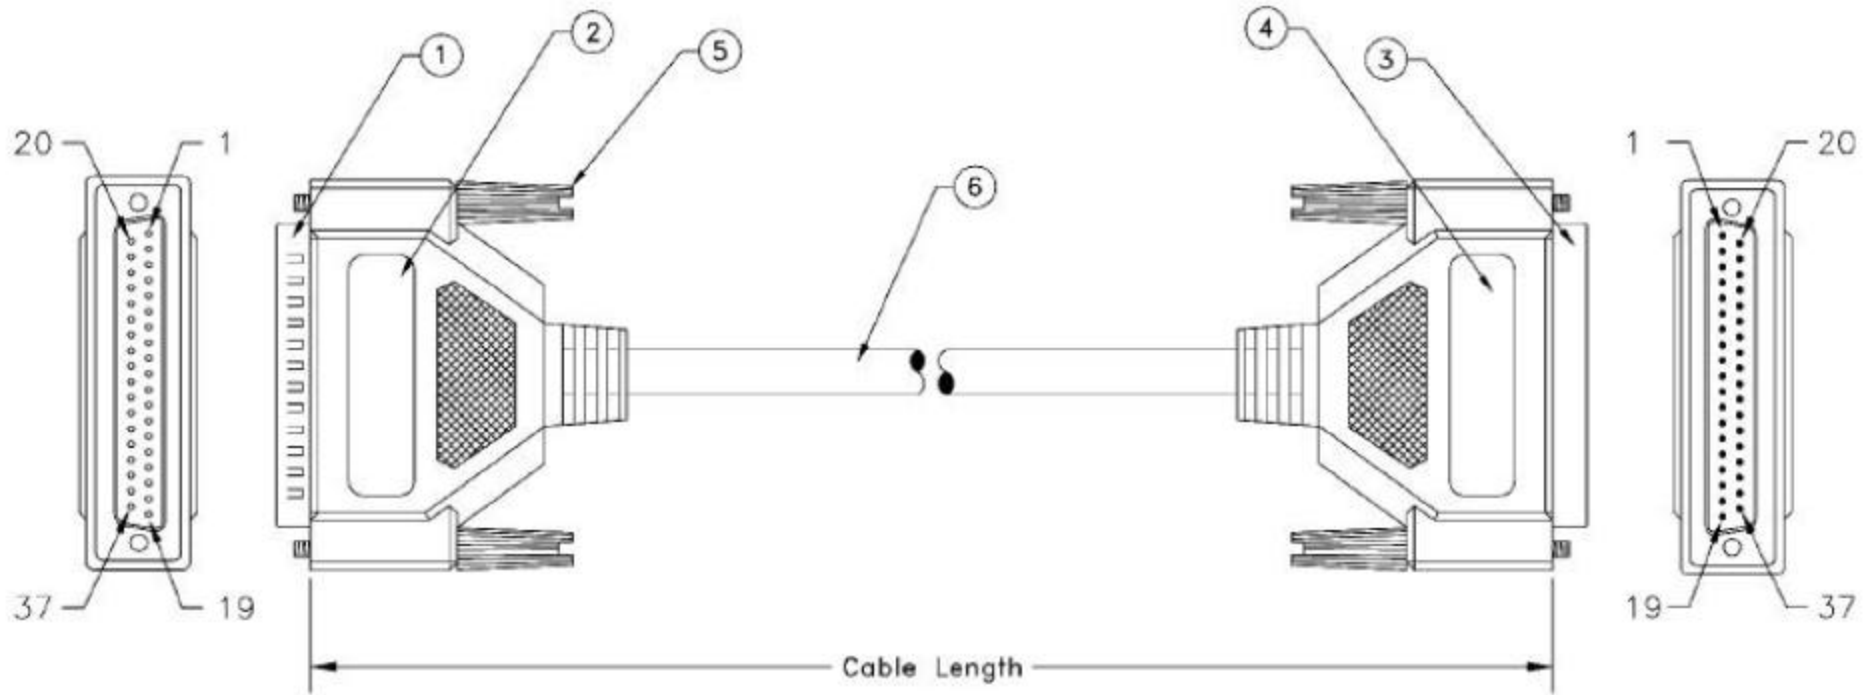

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 37 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 37 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 37 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN ENDS 2. TOLERANCES- DECIMALS X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.		CUSTOMER	SFCABLE.COM 1-888-275-8755
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY		R.F.D. NO.	
		DRAWN Howie Tseng	TITLE DB37 Molded Cable Assembly (DB37, M/F, 1:1, Molded)
		CHECKED	DATE 05/12/95
		CUSTOMER APPROVAL	SIZE D720-XX
			PART NO. D720-XX
			REV. A
			SCALE NONE RELEASE DATE 05/12/95 SHEET 1 OF 1