P1,P2:	M-Y139C
	M-139C
P3: M-426E	

Customer No:	No:

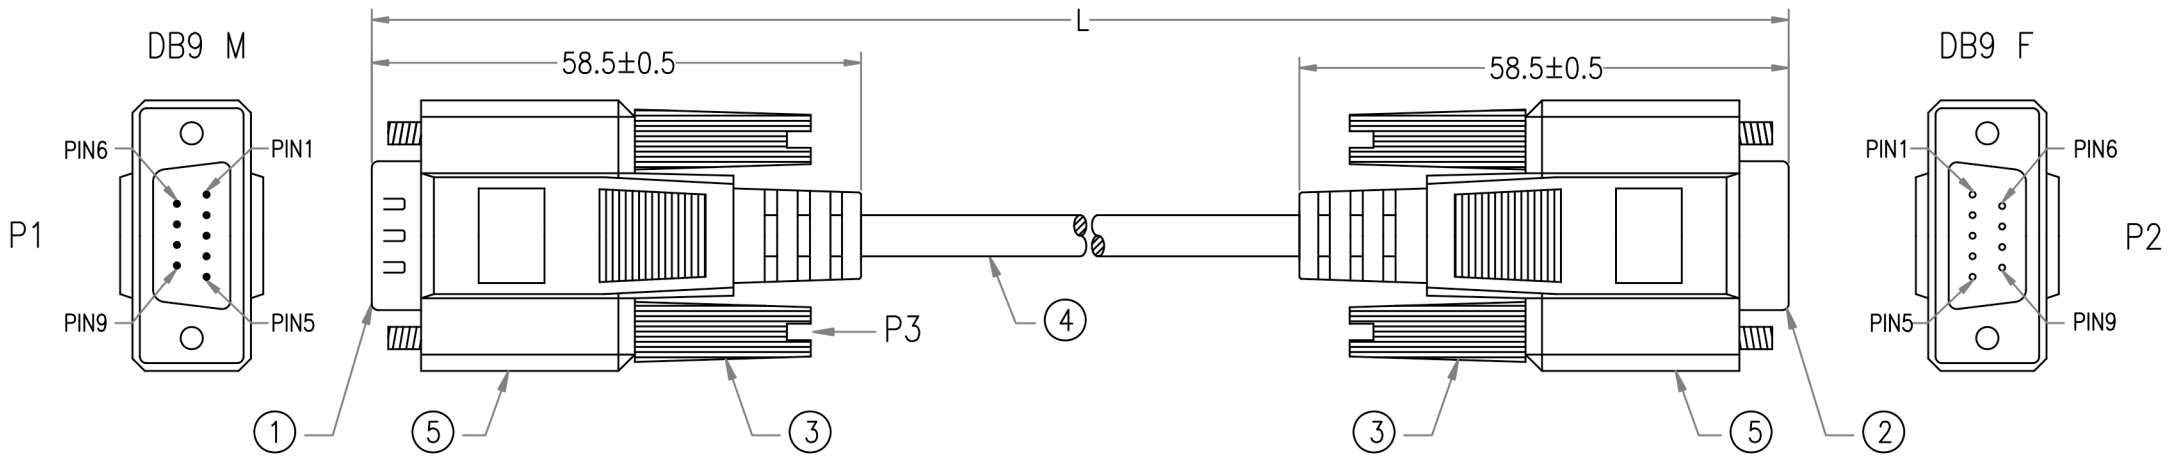

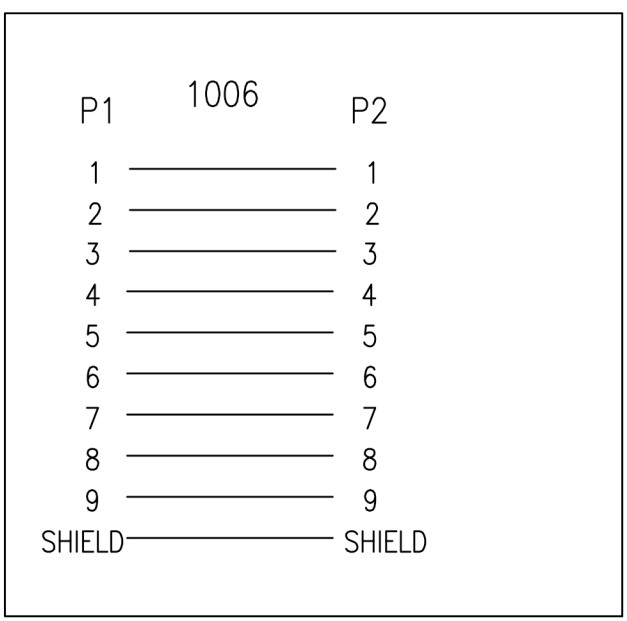

*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION		Q'TY	Supplier
5	BLACK PVC TUBE ø3.0*22mm	H7A001-0304K09	2	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	H5BL31-0304B01	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	1	M277
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA12-0277U09	1	M277

APPROVED		SFCable	Cable Length Unless Other Spec. Tolerances:	
CHECKED	HU		0 ~200mm	±10mm
DRAWING	ZHU		201~1000mm	±20mm
DATE	05/JULY/19	ITEM NO. D920-XX	1001 ~1500mm	±25mm
			1501~2100mm	±30mm
			2100mm↑	±40mm
			UNIT:mm	

⚠REV.2 2015.07.13	ADD SPEC	⚠REV.3 2019.07.05	MODIFY PRODUCT NO
⚠REV.1 2010.09.21	ADD CONDUCTOR COLOR CODE	CHECKED	