


M-Y139C

Customer No: No:1

P1,P2:  
M-139C

P3: M-426E

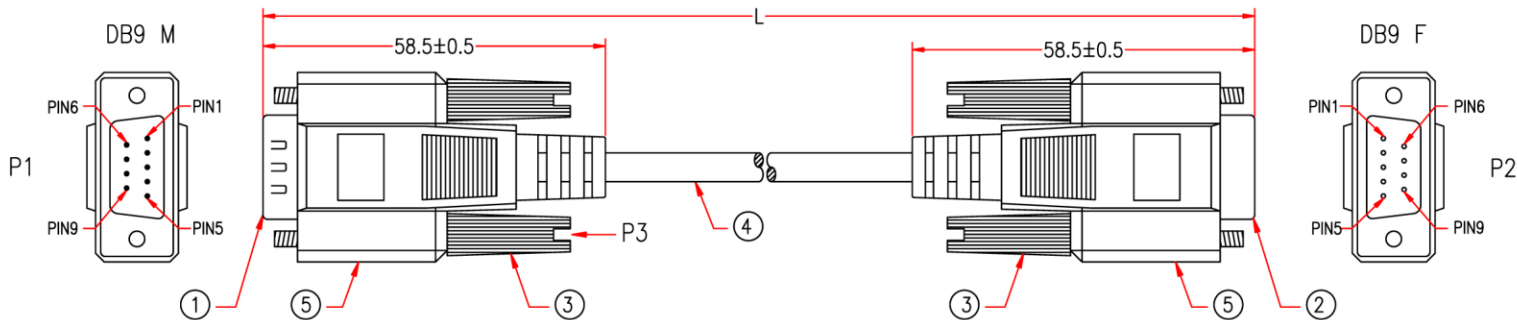

P1	1006	P2	
1	—————	1	BROWN
2	—————	2	RED <span style="color:red">△</span>
3	—————	3	ORANGE
4	—————	4	YELLOW
5	—————	5	GREEN
6	—————	6	BLUE
7	—————	7	PURPLE
8	—————	8	GREY
9	—————	9	BLACK
SHIELD	—————	SHIELD	

\*NOTE: All relevant materials are complied with RoHS directive .

5	BLACK PVC TUBE $\phi$ 3.0*22mm	A4HA10-0959	2	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0579	2	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	H5BL31-0304B01	L=20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	A6AA30-0095	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA17-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED: 2015.07.13

CHECKED: 周瑞雯

DRAWING: ZHU

DATE: 13/JUL/15



Cable Length	Unless Other Spec.
0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

ITEM NO. D920-XX

UNIT:mm



REV.2 2015.07.13 ADD SPEC

REV.1 2010.09.21 ADD CONDUCTOR COLOR CODE

CHECKED