


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/12/95	H.T.

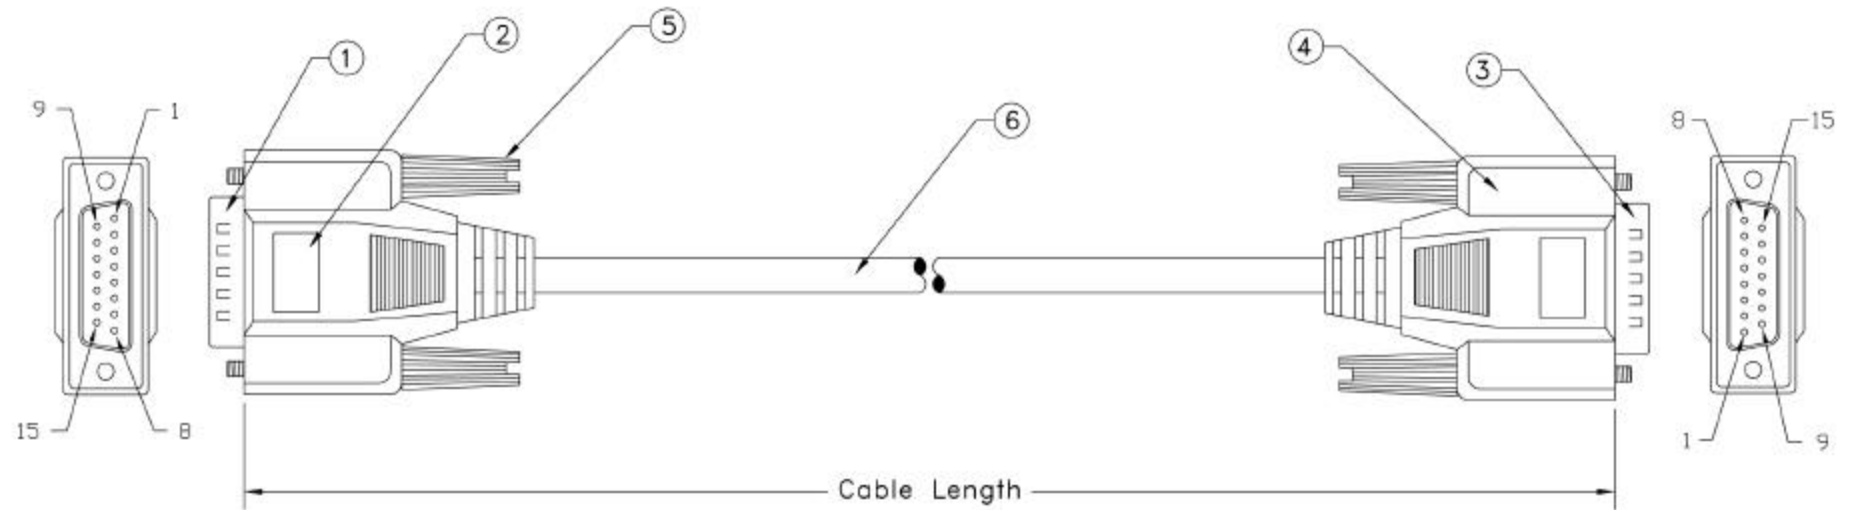

**Pin Assignment**

DB15 Male	DB15 Male
1	1
2	2
3	3
4	4
5	5
{	}
14	14
15	15
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC Jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 15 Pin Male w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 15 Pin Male W/Gold Plating Contacts	1	PCS.

**CABLE ASSEMBLY PARTS LIST**

UNLESS OTHERWISE SPECIFIED:  
 1. DIMENSIONS ARE IN INCHES  
 2. TOLERANCES:  
 DECIMALS .XXX ±0.25  
 3. DO NOT SCALE DRAWING  
 4. REMOVE ALL BURRS AND  
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT  
 THIS DRAWING AND/OR INFORMATION OR  
 SUBJECT MATTER CONTAINED HEREIN,  
 SHALL NOT BE USED, COPIED OR  
 DISSEMINATED IN ANY MANNER, OR FOR  
 ANY PURPOSE, OTHER THAN AS  
 EXPRESSLY STATED BY

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	05/12/95
CHECKED	
CUSTOMER APPROVAL	

<b>SFCABLE.COM</b>			
<b>1-888-275-8755</b>			
TITLE			
DB15 M/M Molded Cable Assembly			
SIZE	DWG NO.	PART NO.	REV.
	DB10-XX	DB10-XX	A
SCALE: NONE	RELEASE DATE: 05/12/95	SHEET: 1 OF 1	