


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/12/95	H.T.

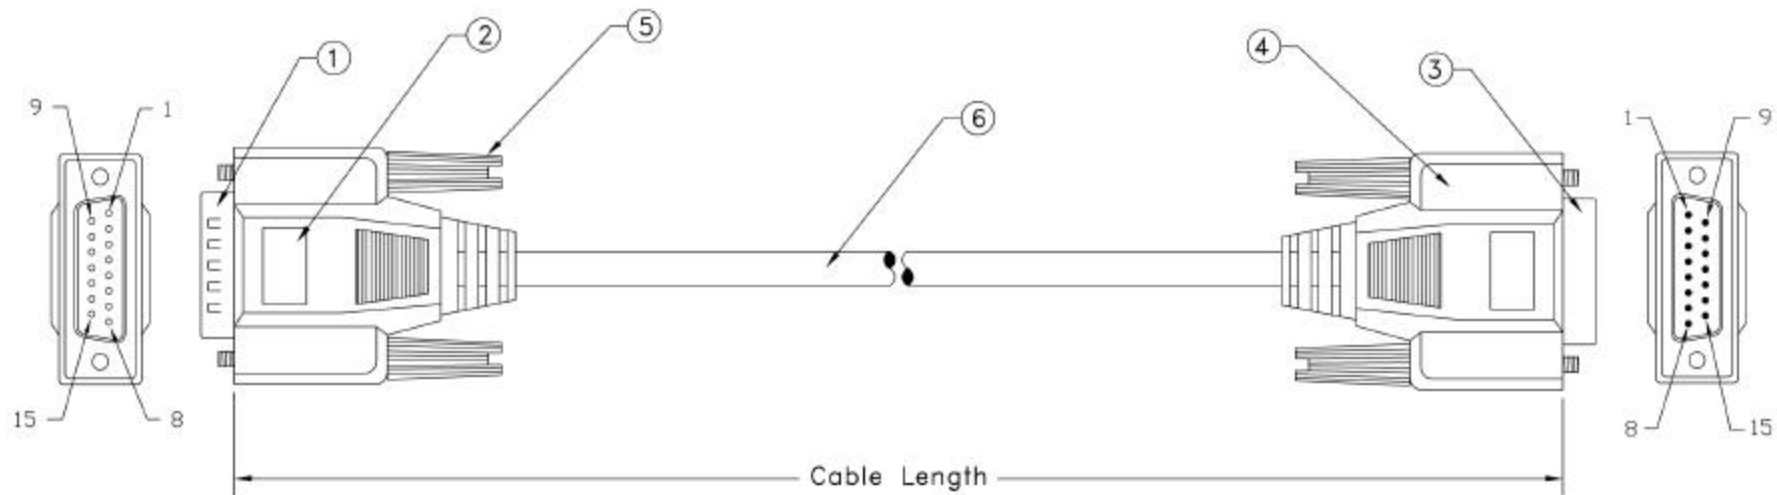

<i>Pin Assignment</i>		
DB15 Male		DB15 Female
1	—	1
2	—	2
3	—	3
4	—	4
5	—	5
}	—	}
14	—	14
15	—	15
G	—	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC Jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 15 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 15 Pin Male W/Gold Plating Contacts	1	PCS.
CABLE ASSEMBLY PARTS LIST			

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSION ARE IN INCHS
 2. TOLERANCES-
 DECIMALES X.XX ±0.25
 3. DO NOT SCALE DRAWING
 4. REMOVE ALL BURRS AND
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
 THIS DRAWING AND/OR INFORMATION OR
 SUBJECT MATTER CONTAINED HEREIN
 SHALL NOT BE USED, COPIED OR
 DISSEMINATED IN ANY MANNER, OR FOR
 ANY PURPOSE, OTHER THAN AS
 EXPRESSLY STATED BY

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	05/12/95
CHECKED	
CUSTOMER APPROVAL	

SFCABLE.COM			
1-888-275-8755			
TITLE			
DB15 M / F Molded Cable Assembly			
SIZE	DWG NO.	PART NO.	REV.
	DB20-XX	DB20-XX	A
SCALE: NONE	RELEASE DATE: 05/12/95	SHEET: 1 OF 1	