


Table:

Length	Part Number
1830±30mm	DP-6MM
3050±40mm	DP-10MM

Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 100V DC/10ms

Pin Assignment

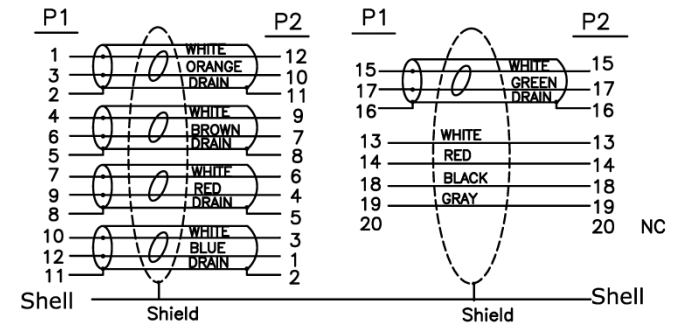

6	Dust Cover For DP Connector	2	pcs																													
5	Copper Foil 360° Solder Type	2	pcs																													
4	Inside Molding: PE	5	g																													
3	S.R. Molding 45P PVC, Colocr: Black	18	g																													
2	Display Port Male, Insulation: Black, Pin Gold Plated, Shell Gold Flash With ABS Plastic Hood	2	Set																													
1	Display Port Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar)*5+28AWG (7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: Black OD:7..3±0.2mm	L	M																													
NO	DESCRIPTION	Q'TY	UNIT	APPD BY																												
										<table border="1"> <thead> <tr> <th colspan="3">TOLERANCE</th> </tr> <tr> <th>INCHES</th> <th colspan="2">M/M</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>.015</td> <td>.30</td> </tr> <tr> <td>.XX</td> <td>.010</td> <td>.10</td> </tr> <tr> <td>.XXX</td> <td>.005</td> <td>.05</td> </tr> </tbody> </table>			TOLERANCE			INCHES	M/M		.X	.015	.30	.XX	.010	.10	.XXX	.005	.05	<b>SFCable.com</b>				
TOLERANCE																																
INCHES	M/M																															
.X	.015	.30																														
.XX	.010	.10																														
.XXX	.005	.05																														
										TITLE: Display Port M TO M Gold CUSTOMER : CUSTOMER P/N : DP-6MM			SCALE: NONE UNIT: MM		DRAWING NO.: REV A																	
										DATE: 2011.05.13		1/1																				