



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION |           |             |                   |
|----------------------|-----------|-------------|-------------------|
| Rev.                 | Rev. Date | Modified By | Brief Description |
|                      |           |             |                   |

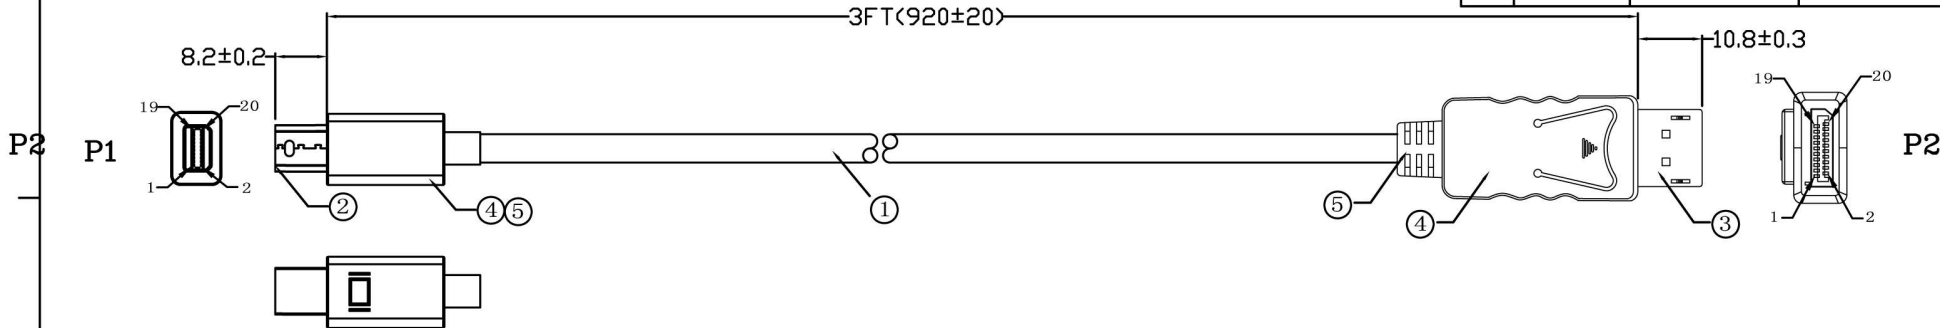

- NOTE:
- CABLE: 32AWG (7/0.08TC\*1P+DAM)\*5P+32AWG (7/0.08TC)\*5C+ADB (16/6/0.12 AL/Mg) PVC JACKET: BLACK  
OD: 5.5±0.2mm  
MARK: DisplayPort Cable Exxxxxx AWM STYLE  
20276 80°C 30V VW-1
  - CONNECTORS:  
DP (M) Plug, CONTACT: GOLD PLATED 1U", SHELL: NICKEL PLATED INSULATION: BLACK.  
MINI DP (M) Plug, CONTACT: GOLD PLATED 1U", SHELL: NICKEL PLATED INSULATION: WHITE.
  - ELECTRONICAL TEST:  
(1). 100% OPEN SHORT & MISS WIRE TEST  
(2). INSULATION: DC 300V/0.01s 10Mohm Min  
(3). CONTACTOR RESISTANCE: 2 ohm
  - ROHS compliant

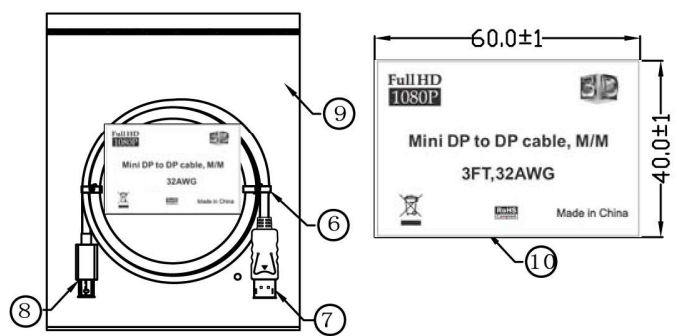

PIN OUT

| P1    | Wire Color | P2    | SIGNAL NAME     |
|-------|------------|-------|-----------------|
| 1     | D.W        | 11    | GND             |
| 3     |            | 12    | ML_Lane 0 (p)   |
| 5     |            | 10    | ML_Lane 0 (n)   |
| 7     | D.W        | 8     | GND             |
| 9     |            | 9     | ML_Lane 1 (p)   |
| 11    |            | 7     | ML_Lane 1 (n)   |
| 13    | D.W        | 5     | GND             |
| 15    |            | 6     | ML_Lane 2 (p)   |
| 17    |            | 4     | ML_Lane 2 (n)   |
| 19    |            | 19    | GND             |
| 2     |            | 18    | Hot Plug Detect |
| 4     |            | 13    | CONFIG 1        |
| 6     |            | 14    | CONFIG 2        |
| 8     | D.W        | 2     | GND             |
| 10    |            | 3     | ML_Lane 3 (p)   |
| 12    |            | 1     | ML_Lane 3 (n)   |
| 14    | D.W        | 16    | GND             |
| 16    |            | 15    | AUX_CH (p)      |
| 18    |            | 17    | AUX_CH (n)      |
| SHELL | D.W        | SHELL |                 |

| NO. | PART NAME    | SPECIFICATION DESCRIPTION  | QTY   | UNIT |
|-----|--------------|--|-------|------|
| ⑩   | Label        | HKDP911B/Z-U026, 3FT copperplate paper Size: 60*40mm Lable Customer No. 184010                       | 1     | PCS  |
| ⑨   | PE Bag       | SIZE: 180*210*TO.08mm  | 1     | PCS  |
| ③   | CAP          | MINI DisplayPor Male Dust Cover  | 1     | PCS  |
| ⑦   | CAP          | DisplayPort Male Dust Cover  | 1     | PCS  |
| ⑥   | TIE          | L=100MM  | 2     | PCS  |
| ⑤   | PVC          | BLACK PVC 60P  | 0.008 | KG   |
| ④   | PE           | PE: LDPE NATURE  | 0.008 | KG   |
| ②   | DP CONN      | DP Male Plug Pin Gold Plated 1U", Shell Nickel Plated Insulation Black ABS Hood                      | 1     | SET  |
| ①   | MINI DP CONN | MINI DP Male Plug Pin Gold Plated 1u", Shell Nickel Plated Insulation White                          | 1     | SET  |
| ①   | CABLE        | 32AWG (7/0.08TC*1P+DAM)*5P+32AWG (7/0.08TC)*5C+ADB (16/6/0.12 AL/Mg) PVC JACKET: BLACK OD: 5.5±0.2mm | 0.92  | M    |

# SF Cable

|                      |                  |  |
|----------------------|------------------|--|
| DRAWN BY <i>Jane</i> | DATE: 2014.06.03 | DESCRIPTION: Mini DP Male to DP Male Cable |
| CHECKED BY           | SHEET 1 of 1     | ITEM NO. DP-MINI                           |
| APPROVED BY          | SCALE NONE       | REV.00 UNIT:mm                             |