


P1,P2: M-Y252A

P3: M-SR153A

Customer No: No.2

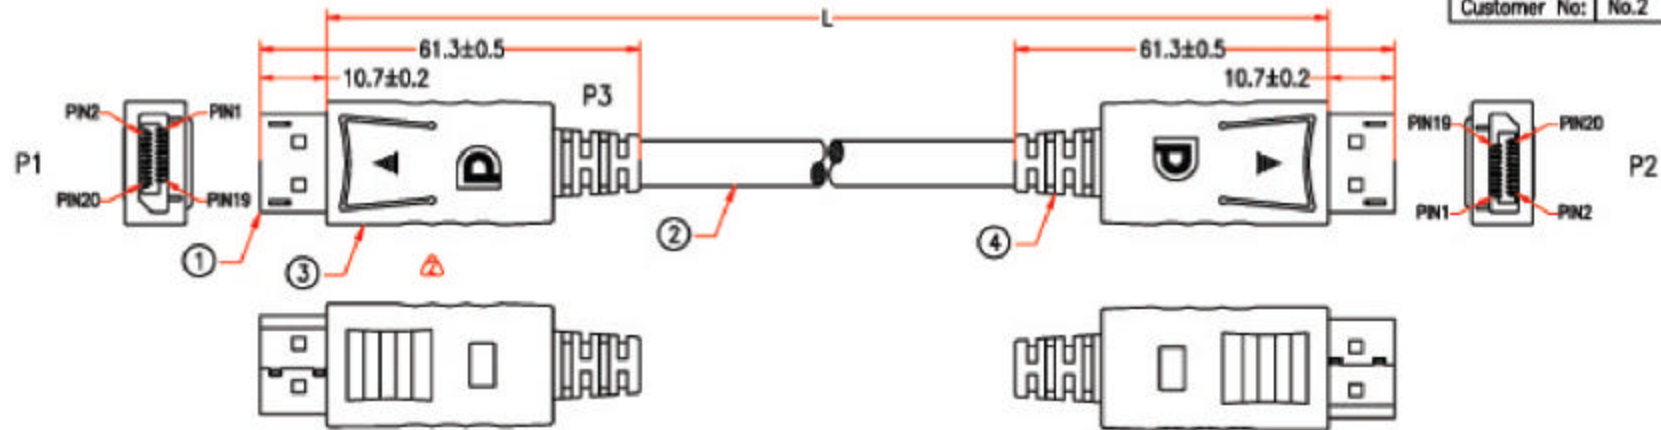

9E79-1

P1	P2	
1	12	RED
3	10	WHITE
2	11	SHIELD
4	9	GREEN
6	7	WHITE
5	8	SHIELD
7	6	BLUE
9	4	WHITE
8	5	SHIELD
10	3	BROWN
12	1	WHITE
11	2	SHIELD
13	13	WHITE
14	14	RED
15	15	BLACK
17	17	WHITE
16	16	SHIELD
18	18	YELLOW
19	19	PURPLE
SHIELD	SHIELD	

* NTOE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	MOLDED PVC BLACK		M304
3	BLACK HEAT SHRINK TUBE #2.5*8mm	10	M743
	COPPER FOIL 24*60mm	2	M309
	COPPER FOIL 7.5*40mm	2	M309
	MOLDED PE COLOR TRANSPARENT		M280
	DISPLAYPORT 20PIN PLASTIC HOOD BLACK	2set	M24
2	UL20276 (2BAWG*1PR+D+AL/MYLAR)*5+2BAWG*4C+AL/MYLAR+BRAID, OD 7.3mm, JACKET BLACK, IMPEDANCE: 100 Ohm	L-20mm	M299
1	DISPLAYPORT 20PIN PLUG, GOLD PLATING 30u" ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, PCB ASSEMBLY TYPE	2	M24

APPROVED		<p>SFCABLE.COM 1-888-275-8755</p>	<p>Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm</p>		
CHECKED	HU				
DRAWING	XIANG				
DATE	24/NOV/08	ITEM NO.	DP-XXMM	UNIT:mm	

RE.2 2008.11.24	MODIFY CABLE INSULATION COLOR & MODIFY MODEL	CHECKED	
RE.1 2008.11.04	MODIFY PLUG	CHECKED	