


P1,P2: M-269I
 P3: M-438A
 P4: M-323C

Customer No: No.1

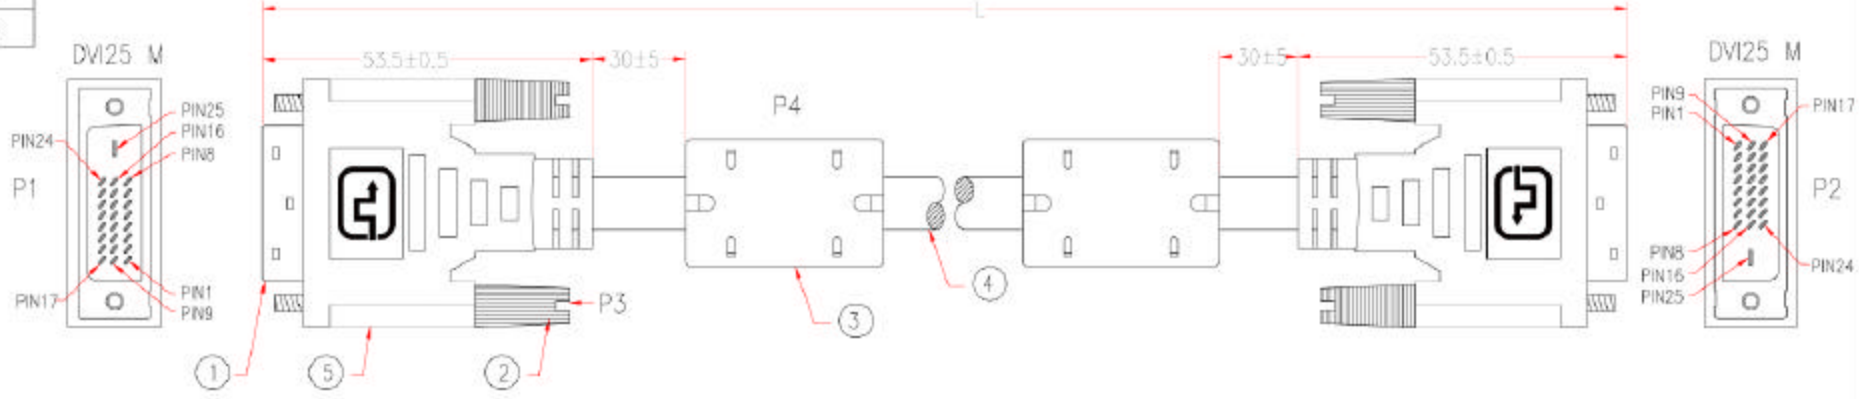

3267-13

P1	P2	P1	P2
1	1 BROWN	14	14 ORANGE
2	2 WHITE	15	15 YELLOW
3	3 SHIELD	16	16 WHITE
4	4 RED	17	17 GREEN
5	5 WHITE	18	18 WHITE
3	3 SHIELD	19	19 SHIELD
6	6 RED	20	20 BLUE
7	7 PURPLE	21	21 WHITE
9	9 ORANGE	19	19 SHIELD
10	10 WHITE	23	23 GREY
11	11 SHIELD	24	24 WHITE
12	12 YELLOW	22	22 SHIELD
13	13 WHITE	22	22 SHIELD
11	11 SHIELD	SHIELD	SHIELD

* NOTE: All relevant materials are complied with RoHS directive .:

No.	DESCRIPTION	Q'TY	Supplier
5	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No.EH002601C-013	2	M304
	BLACK HEAT SHRINK TUBE #0.8*4mm	14	M743
	BLACK HEAT SHRINK TUBE #1.0*20mm	2	M743
	BLACK HEAT SHRINK TUBE #1.5*2mm	14	M743
	BLACK HEAT SHRINK TUBE #2.0*4mm	14	M743
	DVI25 TINPLATE	2	M58
ASSEMBLY PVC BOOT, COLOR BLACK	2	M304	
4	UL20276 [(28AWG*1P+D+FAM)*7PCS+(28AWG*1PAIR)+(28AWG*3C)] +AM+AMA BRAID OD 8.5mm, JACKET BLACK	L-20mm	M2
3	FERRITE CORE 17.5*9.5*28.5mm	2	M113
	MOLDED PVC BLACK		M304
2	MOLDED THUMBSCREW #4-40 LENGTH 44.25mm, BLACK	4	M95
1	DVI25 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	2	M85

APPROVED		SFCABLE.COM	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIANG		
DATE	02/DEC/08	ITEM NO.	DV11-XX
			UNIT:mm

RE.1 2008.12.02	MODIFY CABLE INSULATION COLOR	CHECKED
RE.1 2008.08.15	MODIFY MODEL FOR MOULDING TO ASSEMBLY	CHECKED